


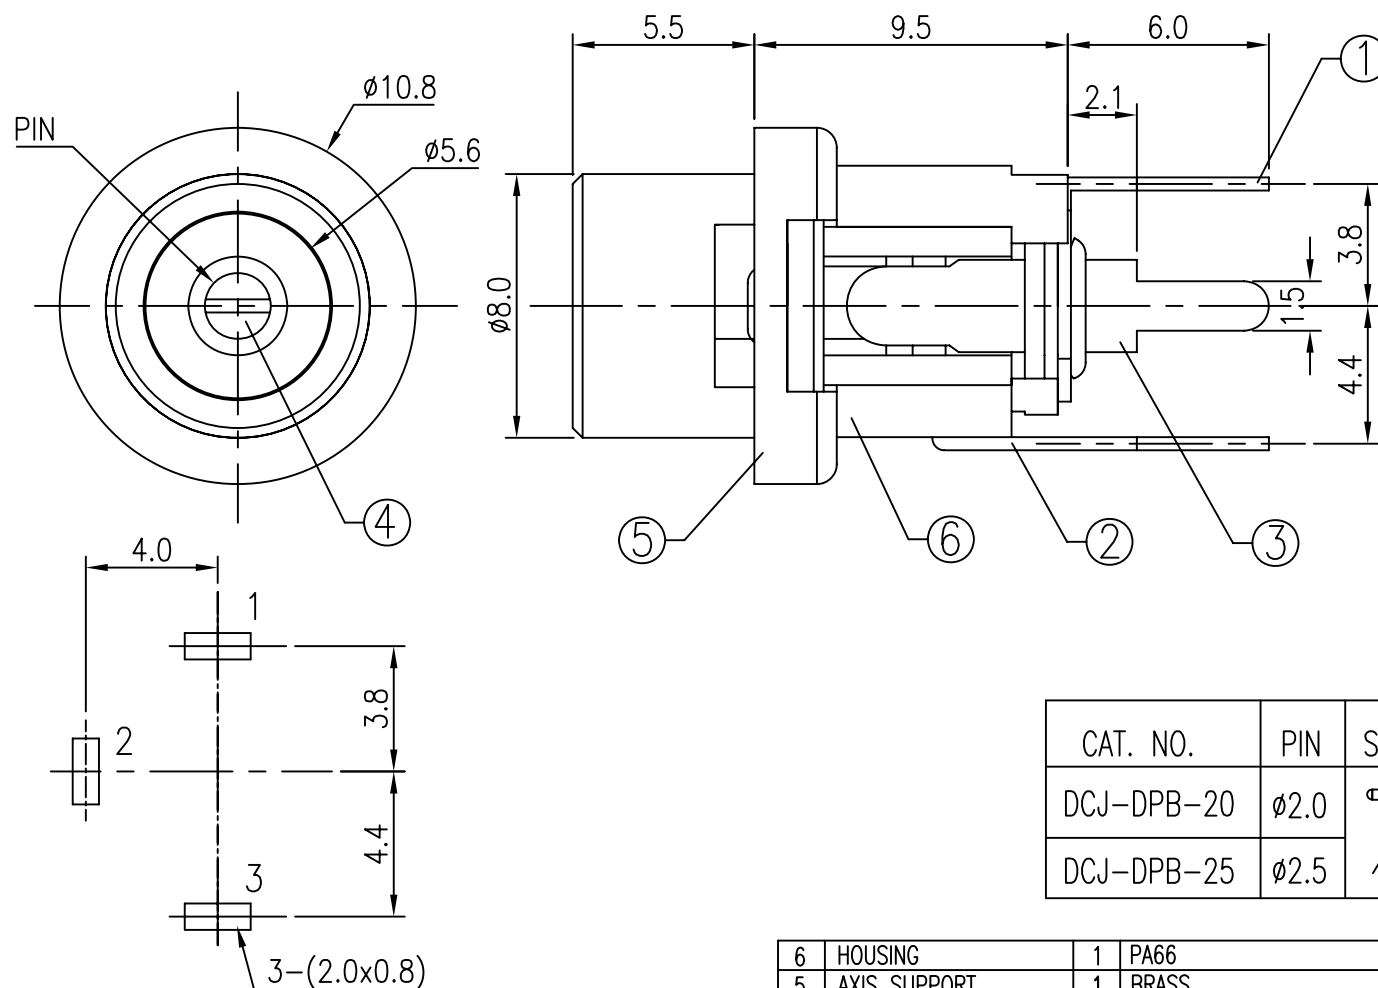

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

CAT. NO.	PIN	SCHEMATIC
DCJ-DPB-20	$\phi 2.0$	1
DCJ-DPB-25	$\phi 2.5$	3
		2

6	HOUSING	1	PA66	
5	AXIS SUPPORT	1	BRASS	MB:Cu Ni PLATED
4	PIN	1	H59 BRASS	MB:Cu Ni PLATED
3	SPRING	1	BRONZE	MB:Cu Cu/Sn PLATED
2	CURVE PIECE	1	H62 BRASS	MB:Cu Cu/Sn PLATED
1	FLAT PIECE	1	H62 BRASS	MB:Cu Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION



ORDER INFORMATION

DCJ-DPB-xx-LF
SERIES | | LEADFREE
20:2.00
25:2.50
DIP 90° BACK PANEL

DESCRIPTION: DC POWER JACK