

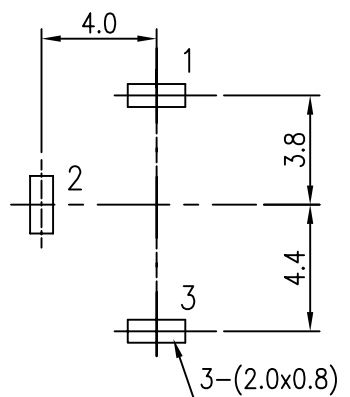


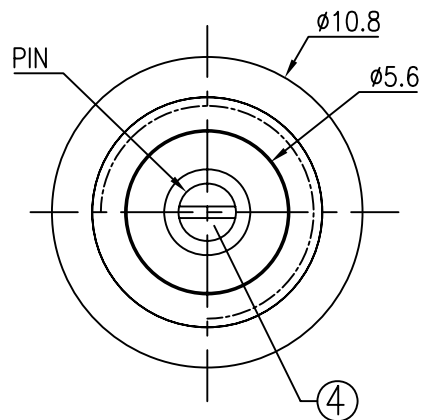

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

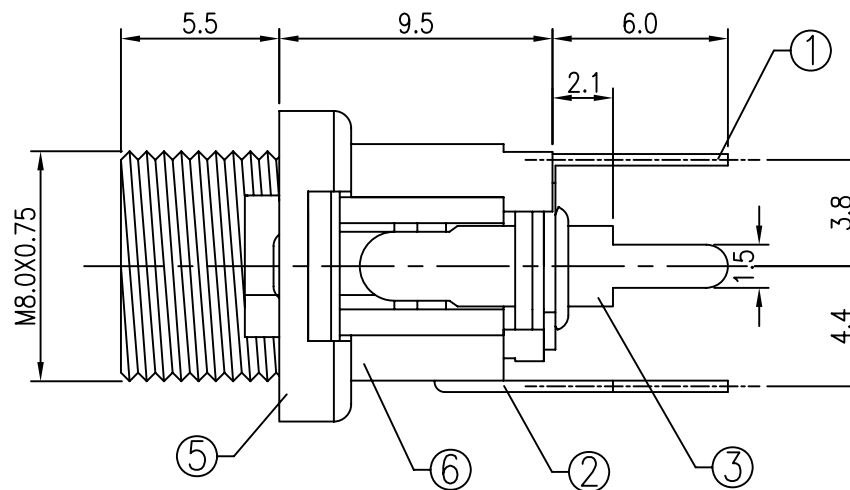

CAT. NO.	PIN	SCHEMATIC
DCJ-DPBT5-20	ø2.0	1
DCJ-DPBT5-25	ø2.5	3
		2

LTR	PART NAME	QTY	MATERIAL	REMARK
6	HOUSING	1	PA66	
5	AXIS SUPPORT	1	H59 BRASS	MB:Cu Ni PLATED
4	PIN	1	H59 BRASS	MB:Cu Ni PLATED
3	SPRING	1	PHOSPHOR BRONZE	MB:Cu Cu/Sn PLATED
2	CURVE PIECE	1	PHOSPHOR BRONZE	MB:Cu Cu/Sn PLATED
1	FLAT PIECE	1	H62 BRASS	MB:Cu Cu/Sn PLATED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DCJ-DPBT5-xx-LF
SERIES
DIP 180°
BACK
PANEL
LEADFREE
20:2.00
25:2.50
THREAD 5.6mm

DESCRIPTION: DC POWER JACK