


Nut

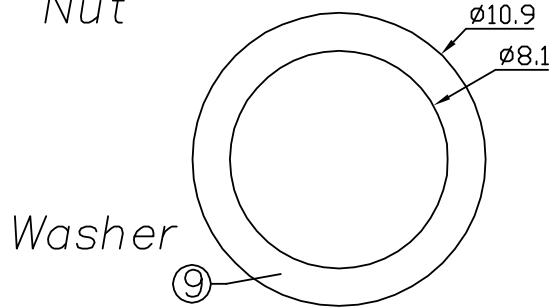

Washer

CAT. NO.	PIN	SCHEMATIC
DCJ-DPBT5NW-20	Ø2.0	

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

9	WASHER	1	SPCC	Ni PLATED
8	NUT	1	H59 (COPPER ALLOY)	Ni PLATED
7	HOUSING	1	PBT 4815	UL-94V0(BLACK)
6	INSULATOR	1	PF	
5	AXIS SUPPORT	1	H59 (COPPER ALLOY)	Cu/Sn PLATED
4	PIN	1	H59 (COPPER ALLOY)	Cu/Sn PLATED
3	SHUNT TERMINAL	1	C2680	Sn PLATED
2	TIP SPRING	1	C2680	Sn PLATED
1	CENTER PIN TERMINAL	1	C2680	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

DCJ-DPBT5NW-20-LF
SERIES | | | | LEADFREE
DIP 180° | | | | 2.0Ø
PANEL | | | | WASHER
BACK | | | | NUT
THREAD 5.6mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:DC POWER JACK