

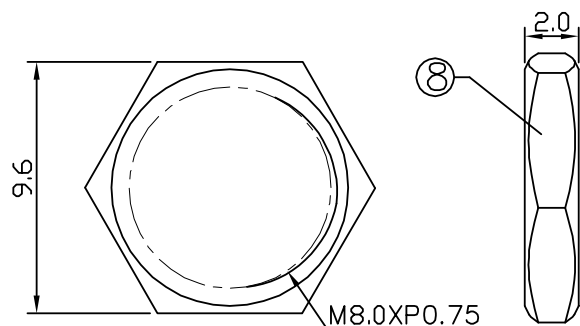
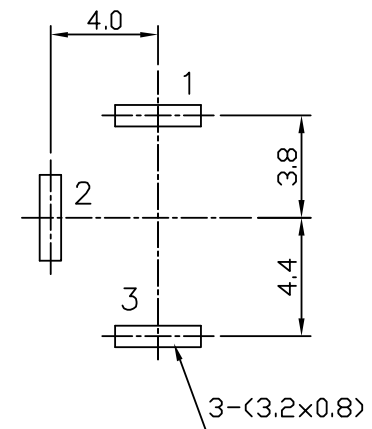
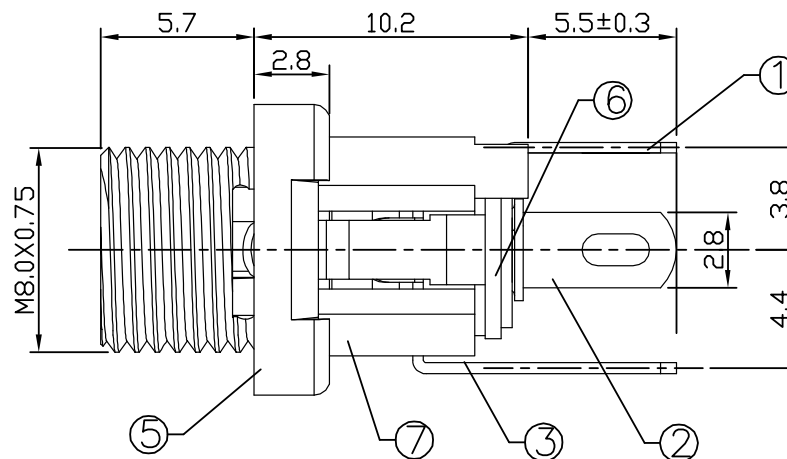


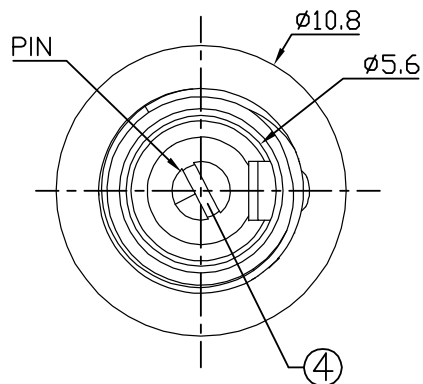

Nut

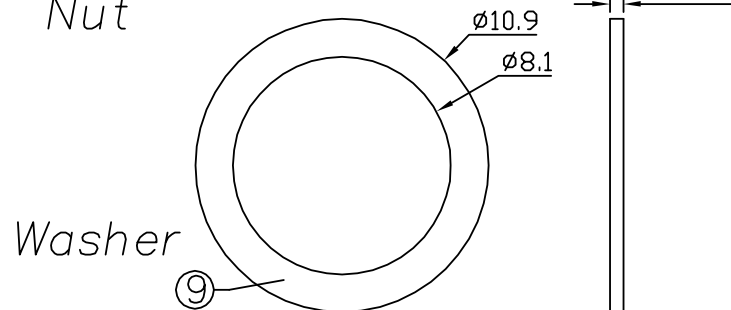

Washer

CAT. NO.	PIN	SCHEMATIC
DCJ-DPBT5NW-25	Ø2.5	

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

9	WASHER	1	SPCC	Ni PLATED
8	NUT	1	H59 (COPPER ALLOY)	Ni PLATED
7	HOUSING	1	PBT 4815	UL-94V0(BLACK)
6	INSULATOR	1	PF	
5	AXIS SUPPORT	1	H59 (COPPER ALLOY)	Cu/Sn PLATED
4	PIN	1	H59 (COPPER ALLOY)	Cu/Sn PLATED
3	SHUNT TERMIALN	1	C2680	Sn PLATED
2	TIP SPRING	1	C2680	Sn PLATED
1	CENTER PIN TERMINAL	1	C2680	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-DPBT5NW-25-LF
SERIES
DIP 180°
PANEL
THREAD 5.6mm
LEADFREE
2.5Ø
WASHER
NUT
BACK

DESCRIPTION:DC POWER JACK