
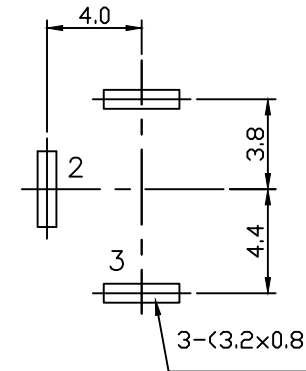
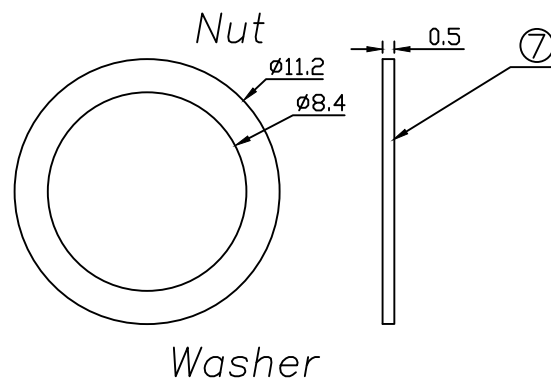
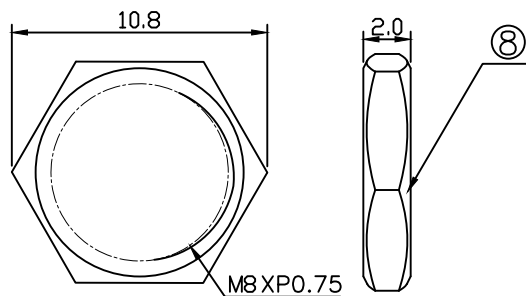


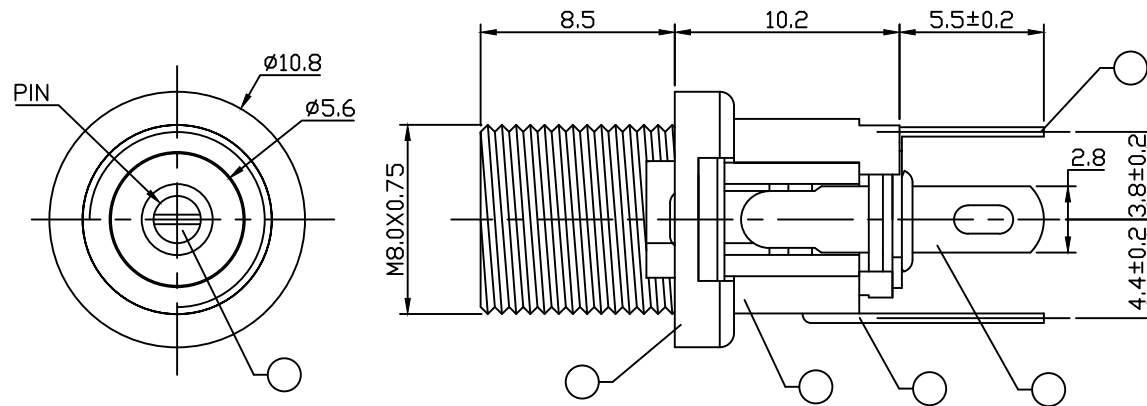

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT NO.	PIN	SCHEMATIC
DCJ-DPBT8NW-20	$\varnothing 2.0$	

8	NUT	1	H59(COPPER ALLOY)	Ni	PLATED
7	WASHER	1	H59(COPPER ALLOY)	Ni	PLATED
6	HOUSING	1	PBT 4815	UL-94V0(BLACK)	
5	AXIS SUPPORT	1	C2680	Ni	PLATED
4	PIN	1	C2680	Ni	PLATED
3	SPRING	1	C5191	Sn	PLATED
2	CURVE PIECE	1	C2680	Sn	PLATED
1	FLAT PIECE	1	C2680	Sn	PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DPBT8NW-20-LF
SERIES | | | | LEADFREE
DIP 180° | | | | 2.0Ø
PANEL | | | | NUT
BACK | | | | THREAD 8.5mm

DESCRIPTION: DC POWER JACK