
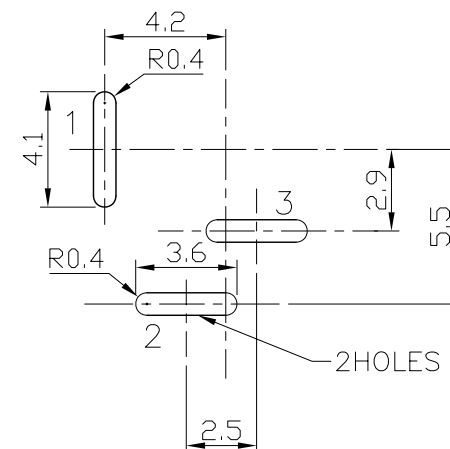
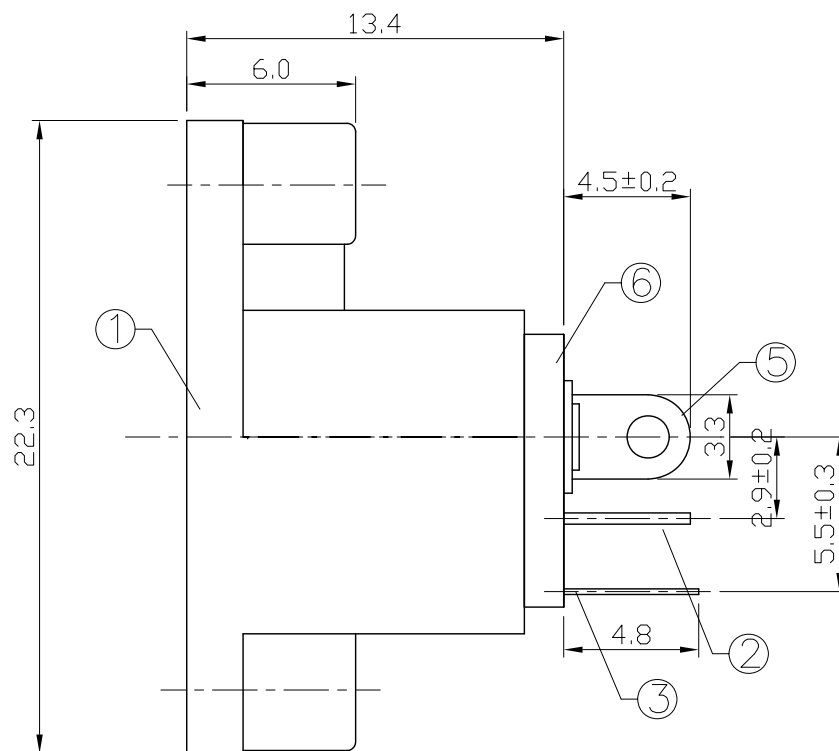


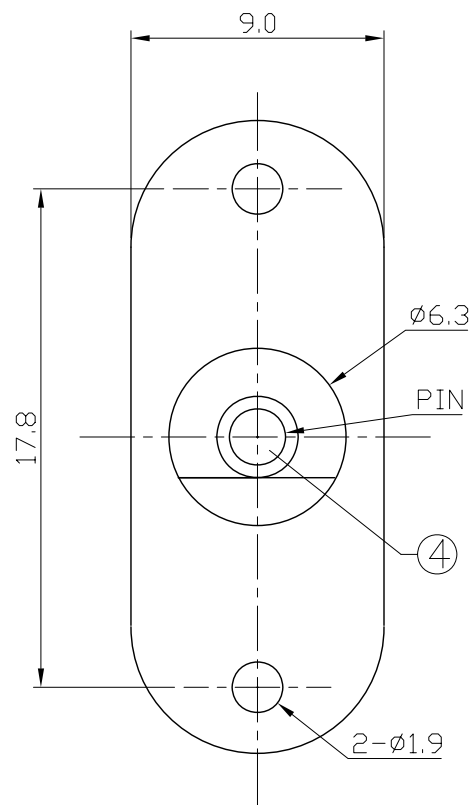

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-DPE13-20	$\phi 2.0$	1
DCJ-DPE13-25	$\phi 2.5$	3
		2

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	AXIS SUPPORT	1	C2680	MB:Cu Sn PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	C5191	MB:Cu Sn PLATED
2	FLAT PIECE	1	C2680	MB:Cu Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

DCJ-DPE13-xx-LF
SERIES
DIP 180°
LEADFREE
20:2.0DIA
25:2.5DIA
HIGH 13.4mm
EAR
PANEL

DESCRIPTION: DC POWER JACK