

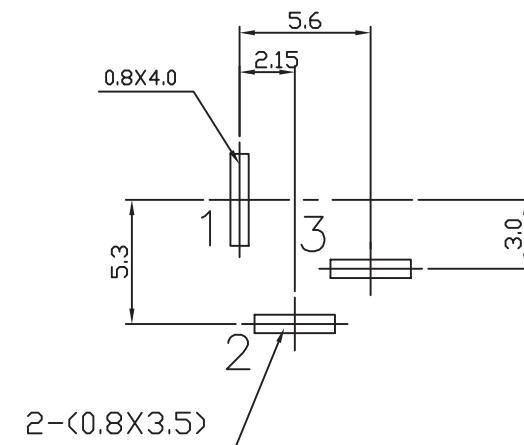
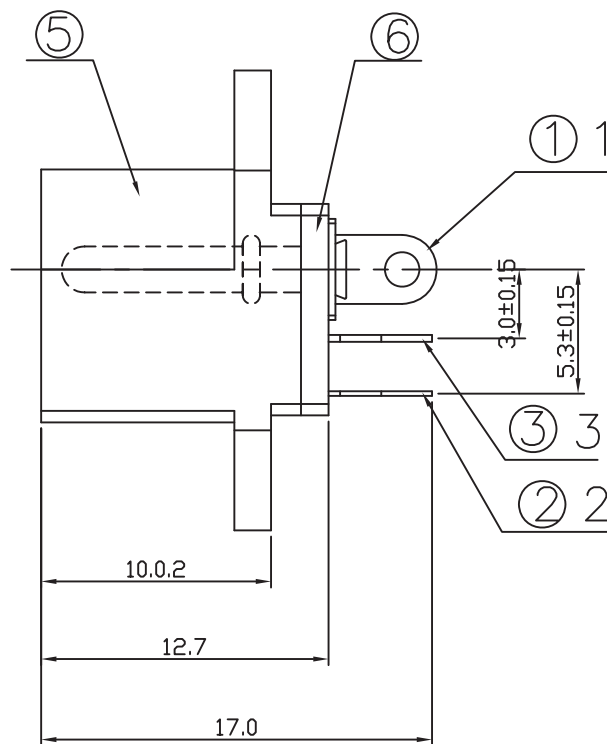


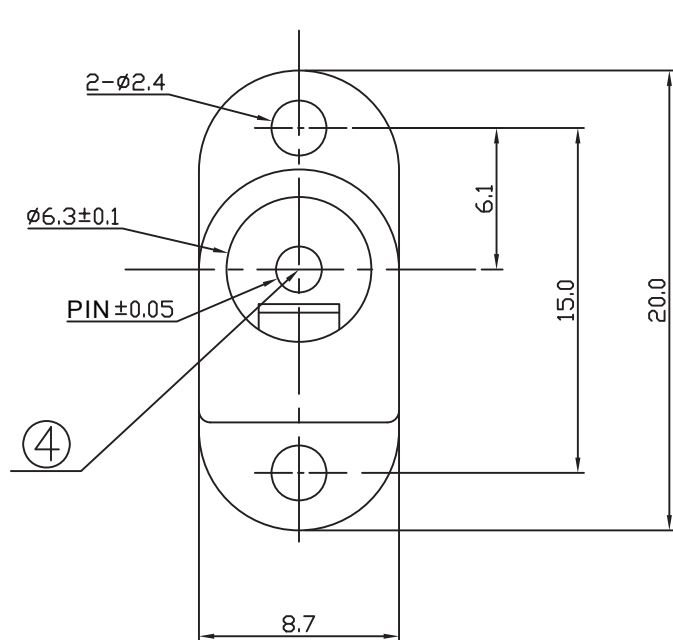

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 Printed-top view)

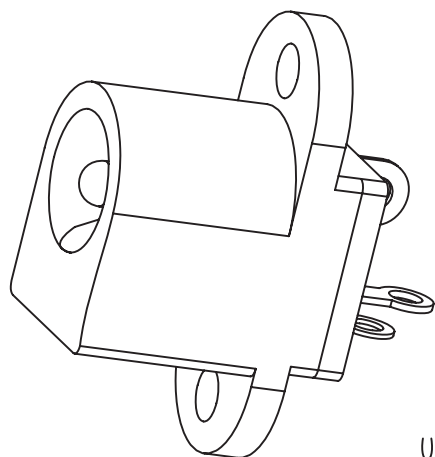

CAT. NO.	PIN	SCHEMATIC
DCJ-DPE16A-20	$\phi 2.0$	
DCJ-DPE16A-25	$\phi 2.5$	

LTR	PART NAME	QTY	MATERIAL	REMARK
6	COVER	1	PF	
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	C2680	Cu/Sn PLATED
3	TERMINAL	1	C2680 t=0.3	Sn PLATED
2	TERMINAL	1	SUS 301 t=0.2	Sn PLATED
1	TERMINAL	1	C2680 t=0.3	Sn PLATED

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE


X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DPE16A-xx-LF

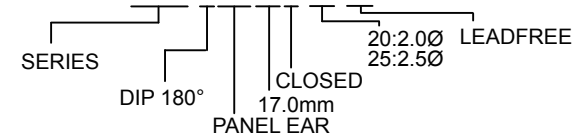

DESCRIPTION: DC POWER JACK