


SPECIFICATIONS:

1. RATED VOLTAGE: 16VRMS AT SEA LEVEL
2. RATED CURRENT: 3 AMPS
3. CONTACT RESISTANCE 30 MOHMS MAX
4. INSULATION RESISTANCE: 50 MOHM MIN. AT 100 OR 200V DC FOR 1 MINUTE.
5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC MIN. FOR 1 MINUTE.
6. INSERTION FORCE: 3.0KGS MAX. (PER CONTACT)
WITHDRAWAL FORCE: 0.3KG MIN. (PER CONTACT)
7. LIFE TEST: WITHSTAND 5,000 CYCLES MIN. INSERTION AND WITHDRAWAL WITH TEST PLUG.

未指定尺寸公差為±0.2mm

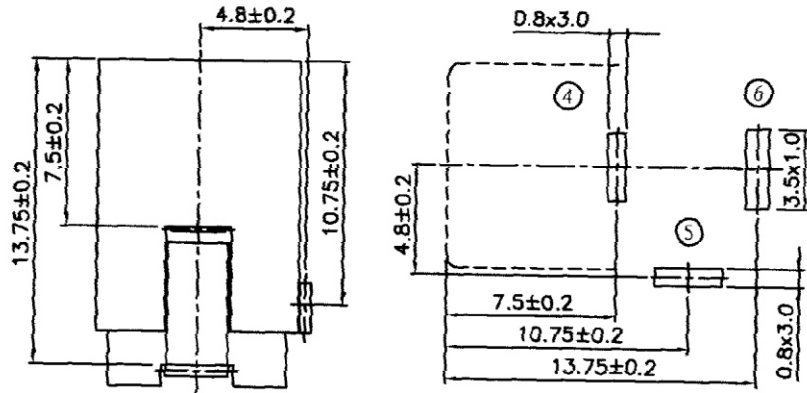

P.C.B. LAYOUT

6.	TERMINAL	1	BRASS 0.5t	TIN	
5.	SHUNT TERMINAL	1	BRASS 0.5t	TIN	
4.	TIP TERMINAL	1	PBS 0.2t	TIN	
3.	PIN	1	BRASS BAR	NICKEL PLATED	
2.	COVER	1	P.B.T.		UL94V-0
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±

DATE

.XXX±

SIZE A4

PPOJECTION

ANG±

照片框

ORDER INFORMATION

DCJ-R-235-LF
SERIES | LEADFREE
2.35Ø
DIP 90°

DESCRIPTION: