

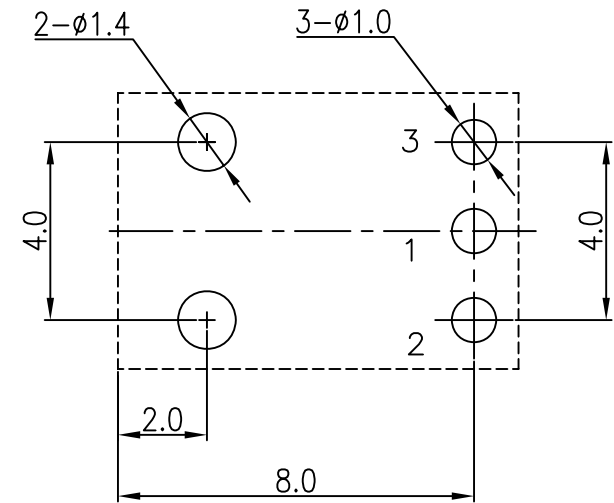
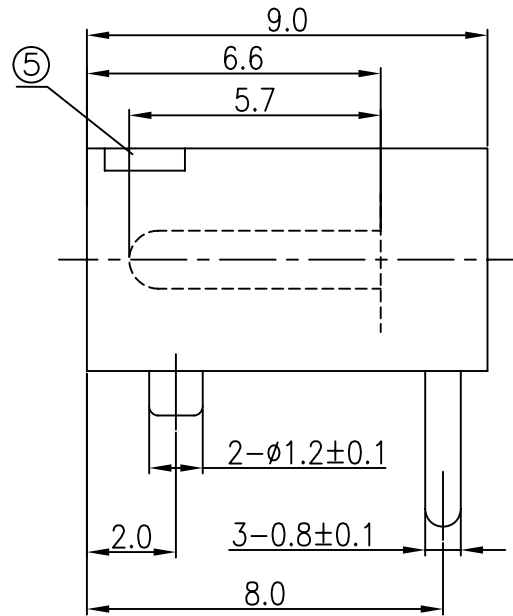


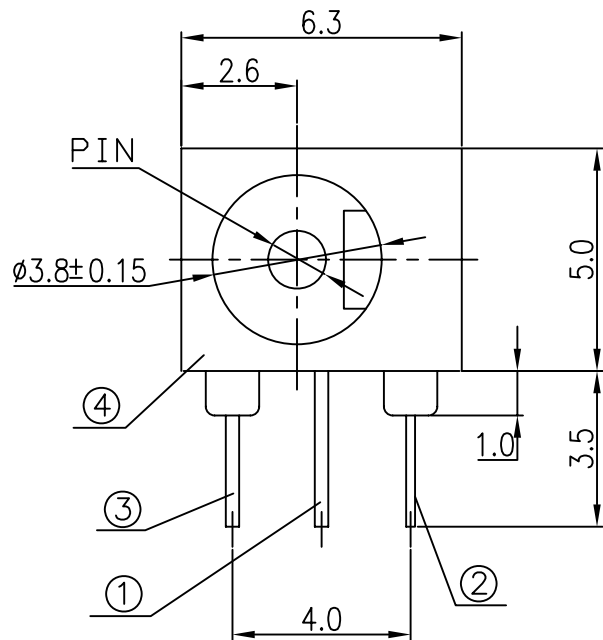

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

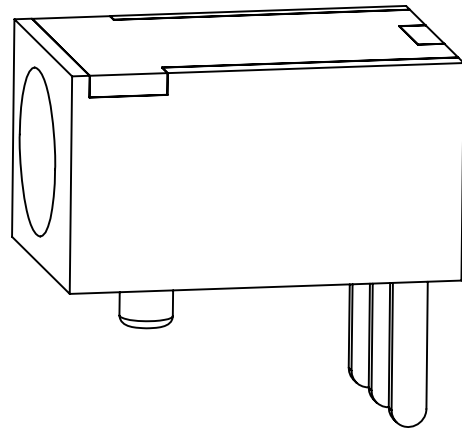

CAT. NO.	PIN	SCHEMATIC
DCJ-R20-10	$\phi 1.0$	
DCJ-R20-13	$\phi 1.3$	

5	COVER	1	PA66	UL-94HB(BLACK)
4	HOUSING	1	PA66	UL-94HB(BLACK)
3	CURVE PIECE	1	C2680 t=0.30	Ag PLATED
2	SPRING	1	SUS301 t=0.20	Ag PLATED
1	PIN	1	C2680 t=0.30	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R20-xx-LF

SERIES LEADFREE
10~1.0Ø
13~1.3Ø
POST 2.0mm
DIP 90°

DESCRIPTION: DC POWER JACK