
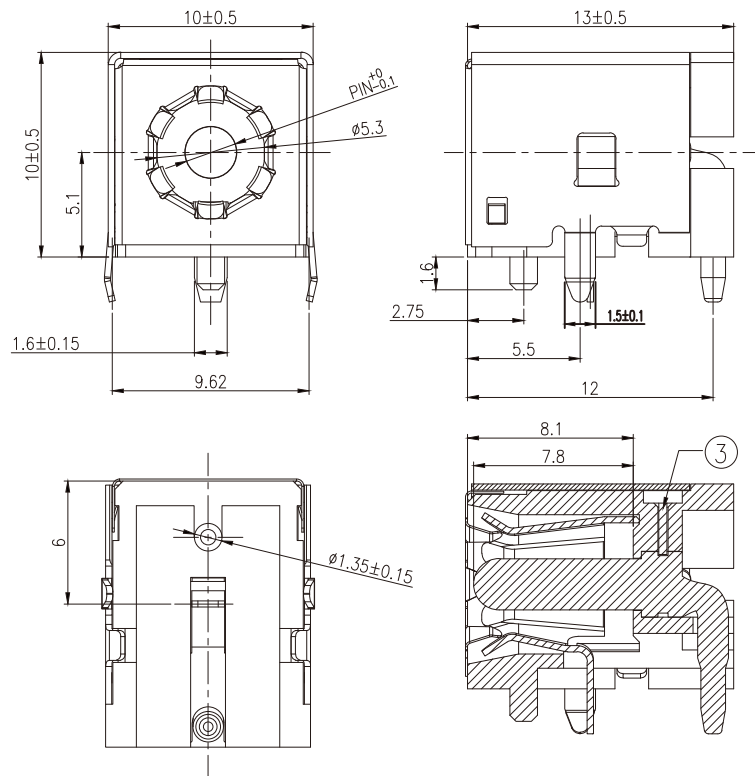



MATE PLUG Ø5.5

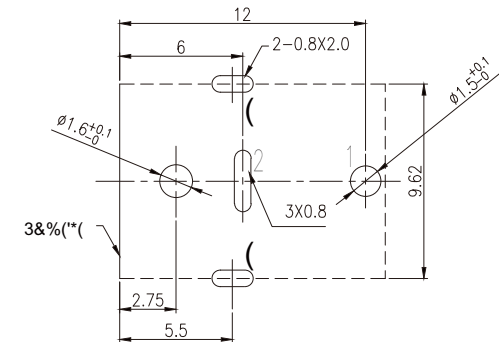

DC MATE PLUG
RATING: DC 20V 10A

T:1.0 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R20M10A-20	Ø2.0	

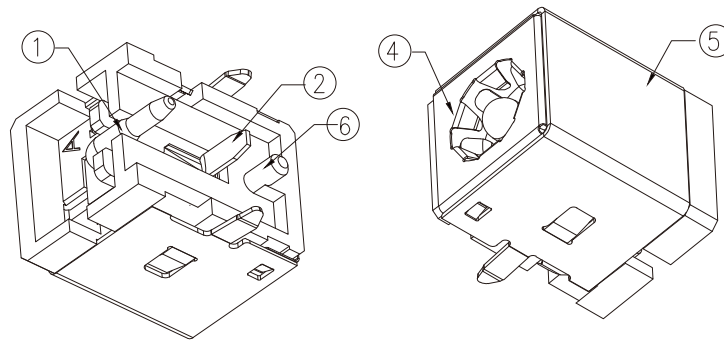

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	GROUND SHIELD	1	C5191	t=0.30 Ni PLATED
4	SHIELD PLATE	1	SUS301	t=0.10
3	PEG	1	C2680	t=0.40
2	TIP SPRING	1	C5191	t=0.30 Ag PLATED
1	CENTER PIN	1	ZINC ALLOY	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R20M10A-20-LF
SERIES
LEADFREE
2.0Ø
10Amp
METAL
POST 2.75mm
DIP 90°

DESCRIPTION: DC POWER JACK