
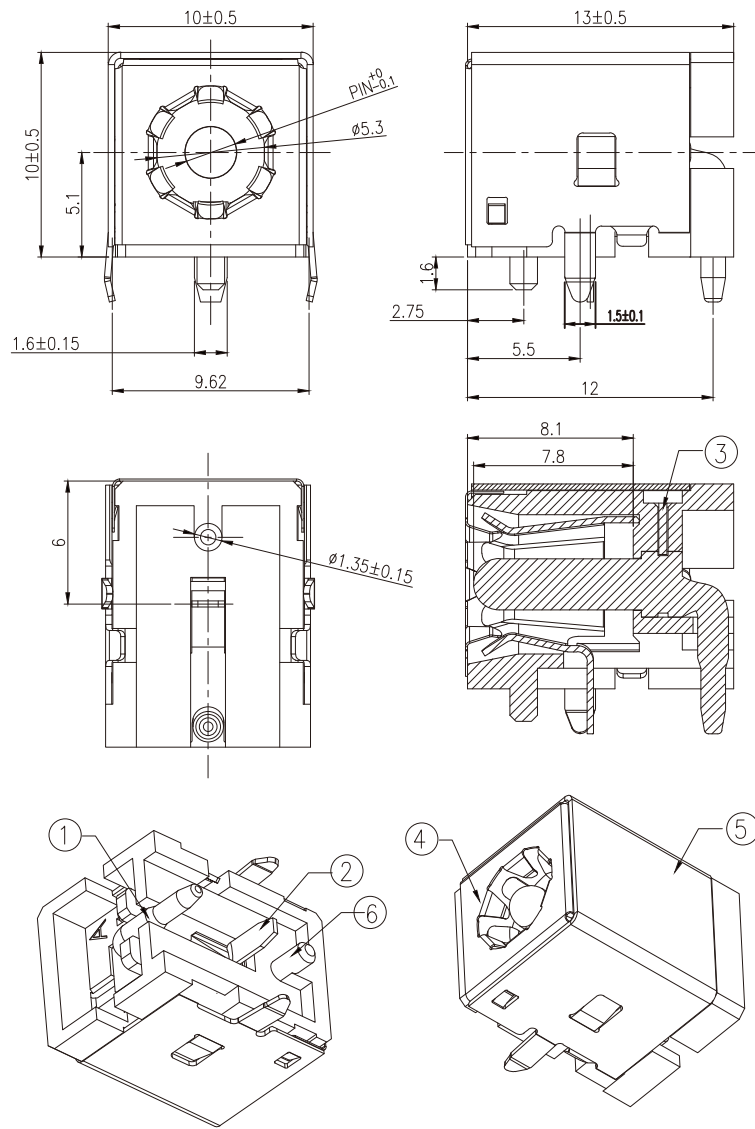


MATE PLUG Ø5.5

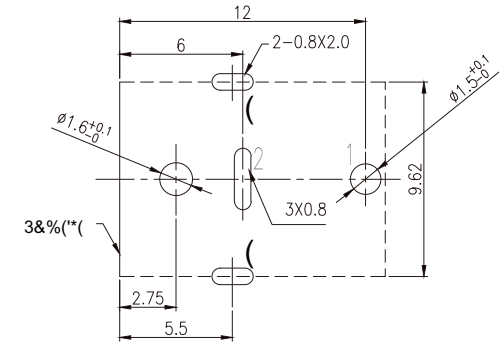

DC MATE PLUG
RATING: DC 20V 10A

T:1.0 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R20M10A-25	Ø2.5	

6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	GROUND SHIELD	1	C5191	t=0.30 Ni PLATED
4	SHIELD PLATE	1	SUS301	t=0.10
3	PEG	1	C2680	t=0.40
2	TIP SPRING	1	C5191	t=0.30 Ag PLATED
1	CENTER PIN	1	ZINC ALLOY	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R20M10A-25-LF
SERIES
LEADFREE
2.5Ø
10Amp
METAL
POST 2.75mm
DIP 90°

DESCRIPTION: DC POWER JACK