
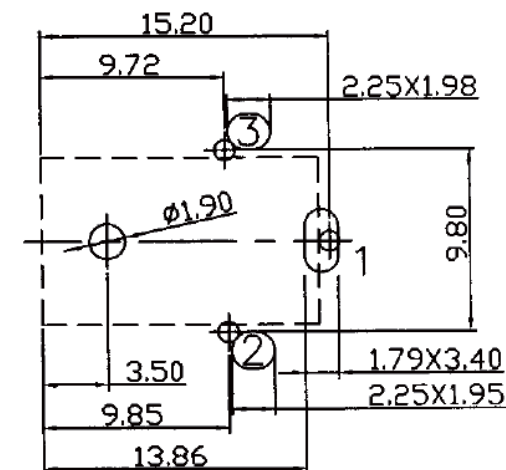
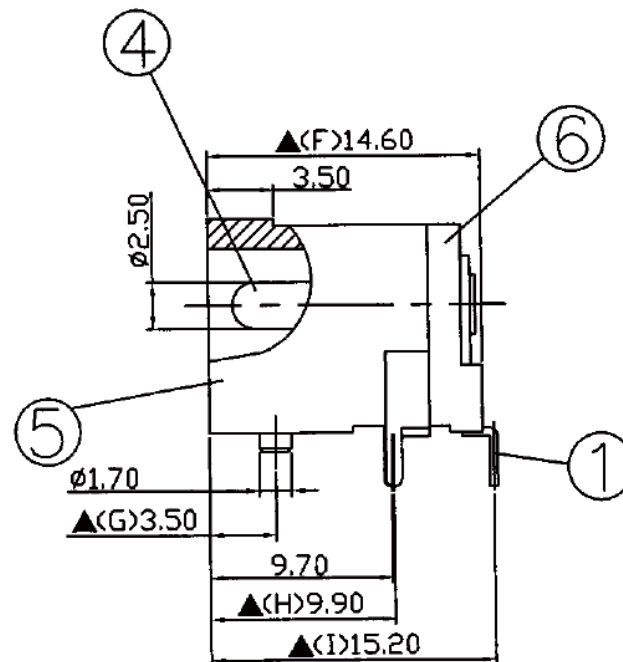
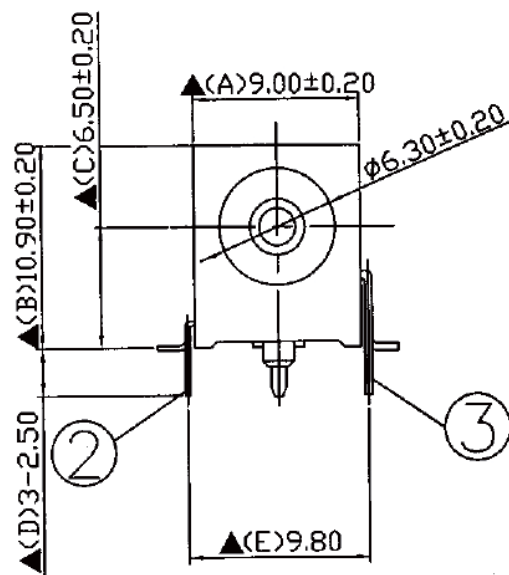


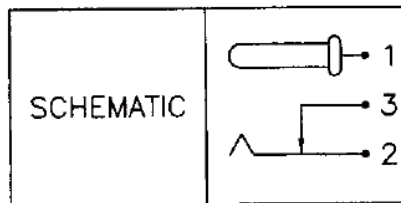

Pin Hole Layout  
(Jack Bottom View)

| 6.  | Cover          | PA9T                  | 1    | Black Color   |
|-----|----------------|-----------------------|------|---------------|
| 5.  | Housing        | PA9T                  | 1    | Black Color   |
| 4.  | Pin(2.5φ)      | Copper                | 1    | Nickel Plated |
| 3.  | Break Terminal | 0.4T Brass            | 1    | Silver Plated |
| 2.  | Sleeve Spring  | 0.25T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Pin Terminal   | 0.4T Brass            | 1    | Silver Plated |
| NO. | Description    | Material              | Q'TY | Finish        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION


照片框

ORDER INFORMATION

DCJ-R30ER-25-LF  
SERIES T T T LEADFREE  
2.50  
REEL  
EAR  
POST 3.0mm  
DIP 90°

DESCRIPTION:

(1)




NAMED 品名 : DCJ-R30ER-25


(2)



NAMED 品名 : 封裝帶  
QUANTITY 數量 : 200PCS\*1=200PCS

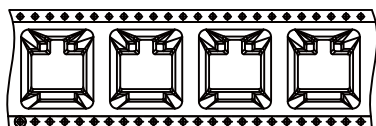

(3)

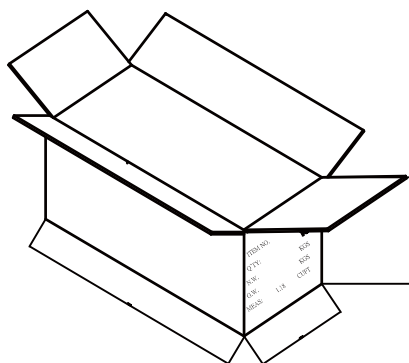

NAMED 品名 : 1.18T 外箱  
MATERIAL 材質 : K=K加強芯  
QUANTITY 數量 : 200PCS\*6=1200PCS  
NET WEIGHT 淨重 :  
GROSS WEIGHT 毛重 :

注:(1)凡未標注之公差皆為 $\pm 0.1\text{mm}$   
注:(2)凡未標注之圓角皆為 $R0.2\text{mm}$   
注:(3)凡未標注之角度公差皆為 $\pm 1^\circ$   
注:(4)凡標注"▲"之尺寸皆為重點檢測尺寸  
注:(5)每一卷不能有連接不良現象  
注:(6)一卷包裝好最後要預留5PCS空位以便客戶上線時用

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DCJ-R30ER-25-LF  
SERIES T T T LEADFREE  
2.50  
REEL  
EAR  
POST 3.0mm  
DIP 90°

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X,  $\pm$

CHECKED BY GENIUS

.X  $\pm$

UNIT / mm

SCALE 1 : 1

.XX  $\pm$

DATE

.XXX  $\pm$

SIZE A4

PPOJECTION

ANG  $\pm$

DESCRIPTION: