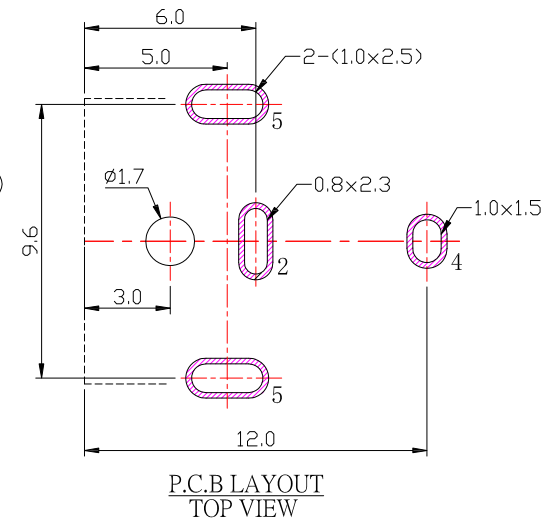
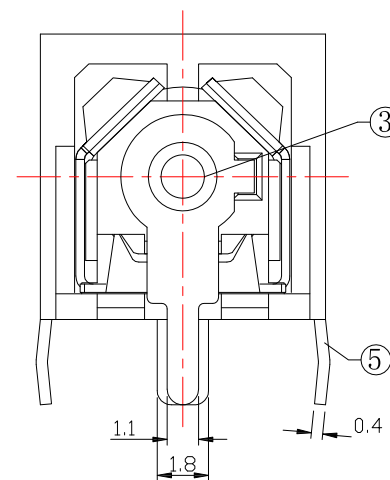
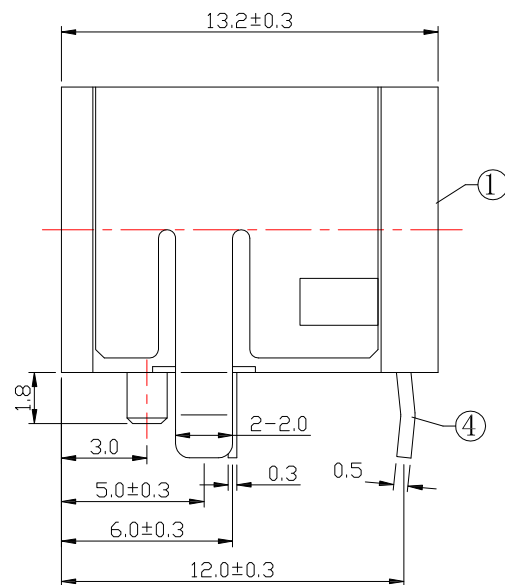
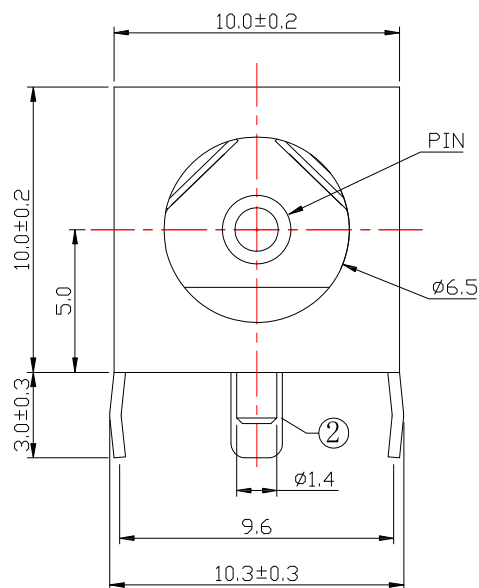




RECOMMENDED PLUG

MODEL NO.	
SCHEMATIC	 3 (4)  2
CENTER PIN	Ø2.0mm Ø2.5mm

SPECIFICATION

- 1.Rating : DC 24V, 5.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-40N;
- 6.life test : 5,000 cycles °

⑤	COAT	1	SPCC	Sn-Plating
④	FLAT FOOT	1	BRASS	Sn-Plating
③	PIN	1	BRASS	Ni-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

DCJ-R30M-xx-LF
SERIES | | LEADFREE
20:2.0Ø
25:2.5Ø
METAL
POST 3.0mm
DIP 90°

DESCRIPTION: DC JACK DIP TYPE