

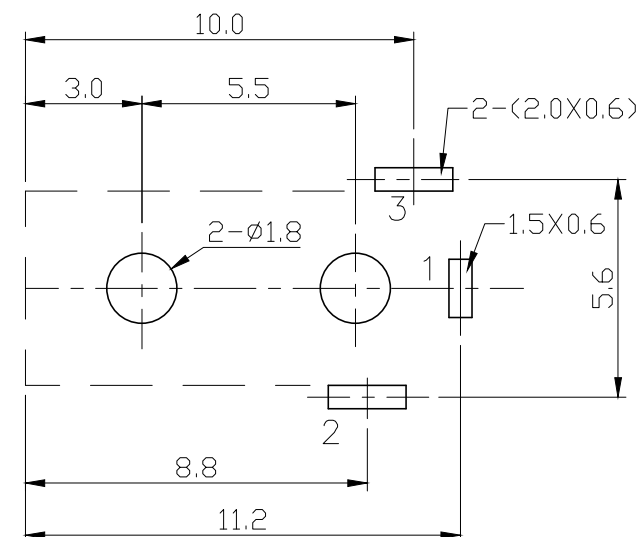
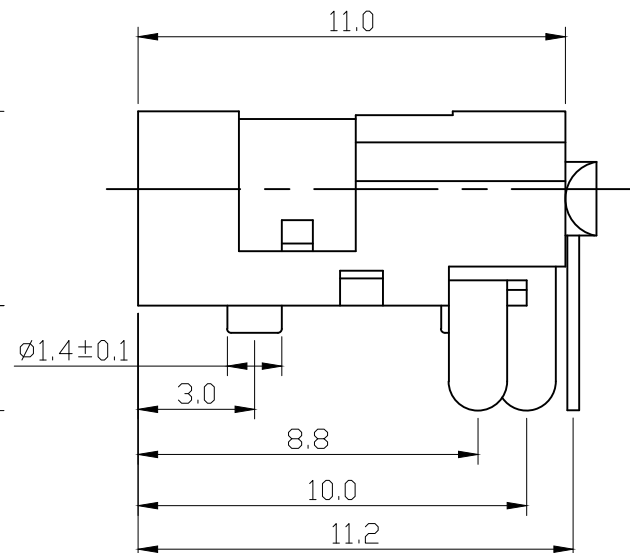
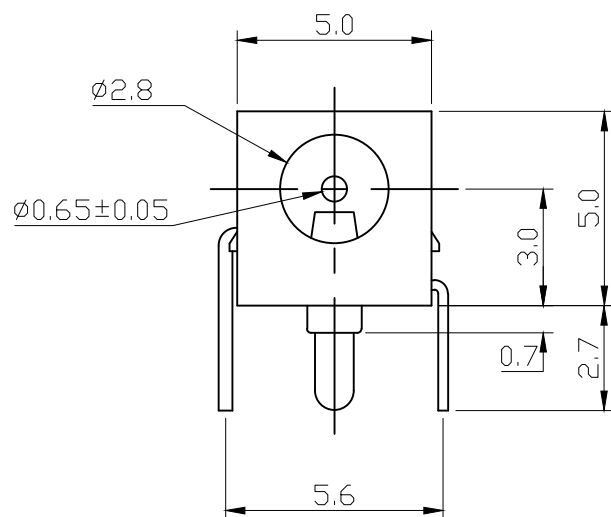




T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

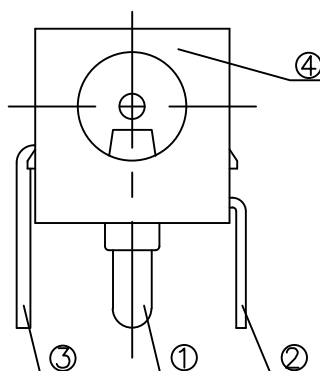

4	HOUSING	1	PBT 4815	UL-94V0(BLACK)
3	SHUNT	1	C2680 t=0.30	Ag PLATED
2	SPRING	1	SUS301 t=0.25	Ag PLATED
1	PIN	1	H59(COPPER ALLOY)	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R35-065-LF
SERIES T LEADFREE
0.65Ø
POST 3.0+5.5mm
DIP 90°

DESCRIPTION: DC POWER JACK