

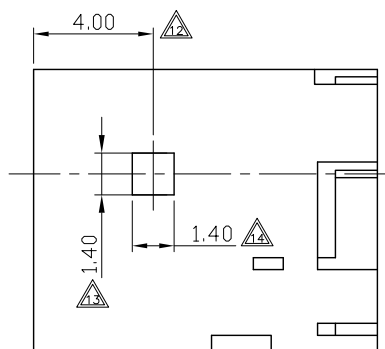
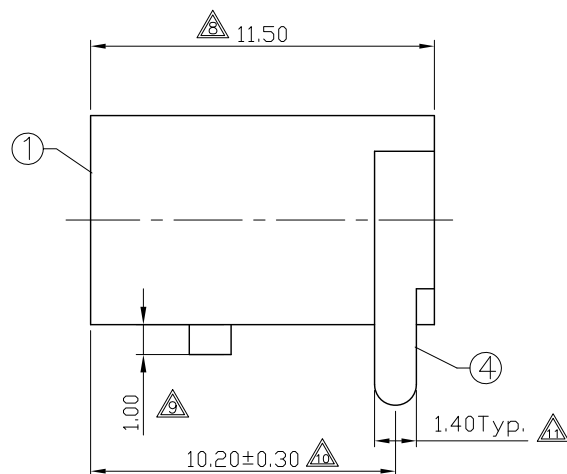


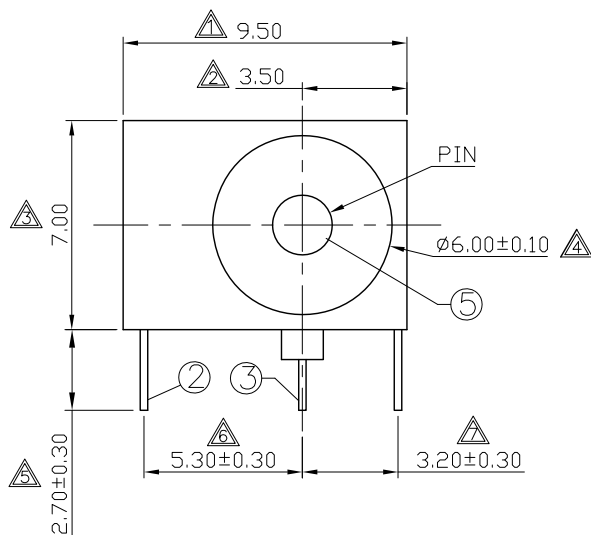


线路板开孔尺寸
P.C.B LAYOUT

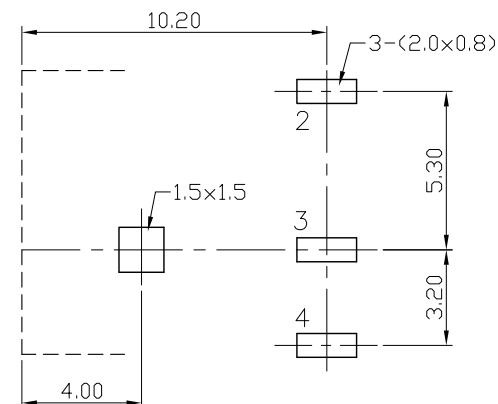


PIN		Ø2.0	Ø2.5
APPD.		DXG	DXJ

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 250VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.
7. Marked $\triangle$ are important dimensions.

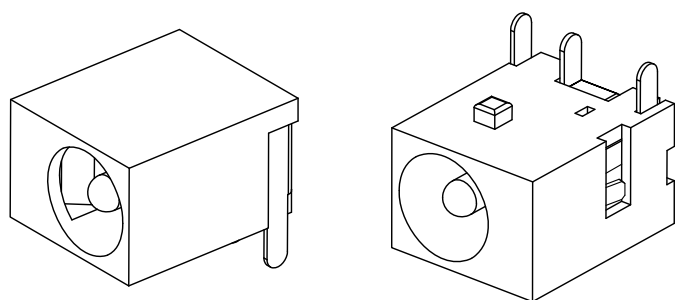

5	插针	1	BRASS	——	Ni-Plating
4	平片	1	BRASS	——	Sn-Plating
3	弯片	1	BRASS	——	Sn-Plating
2	弹片	1	SUS301	——	Sn-Plating
1	基座	1	PBT	——	——
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R40A-xx-LF
SERIES
LEADFREE
20:2.00
25:2.50
A TYPE
POST 4.0mm
DIP 90°

DESCRIPTION: DC POWER JACK