
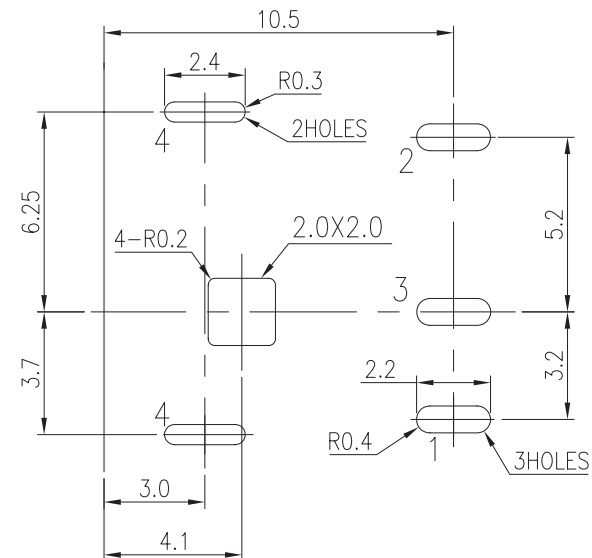
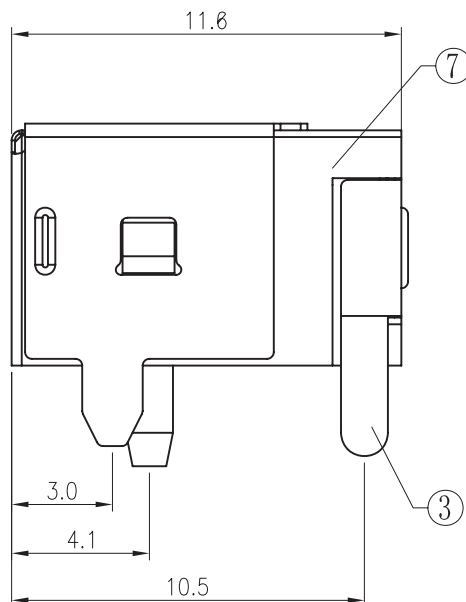


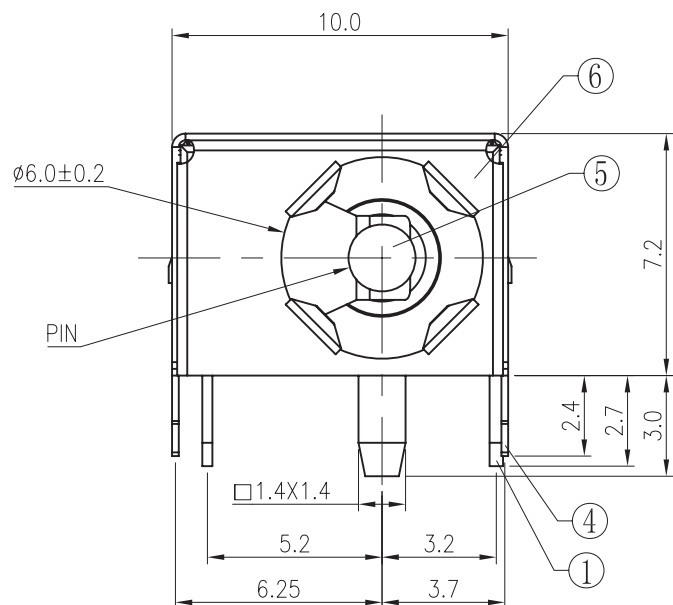

T:1.6 Dimensions of PC board holes

Tolerance :  $\pm 0.05$  (Printed-top view)

| CAT. NO.      | PIN         | SCHEMATIC |
|---------------|-------------|-----------|
| DCJ-R40AM-165 | $\phi 1.65$ |           |

|     |              |     |                   |                |
|-----|--------------|-----|-------------------|----------------|
| 7   | HOUSING      | 1   | PBT 4815          | UL-94V0(BLACK) |
| 6   | SEALED PLATE | 1   | SUS301 t=0.10     | Ni PLATED      |
| 5   | PIN          | 1   | H59(COPPER ALLOY) | Sn PLATED      |
| 4   | COAT FOOT    | 1   | C2680 t=0.20      | Ni PLATED      |
| 3   | CURVE PIECE  | 1   | C2680 t=0.30      | Ag PLATED      |
| 2   | SPRING PIECE | 1   | C5191 t=0.30      | Ag PLATED      |
| 1   | CONTACT FOOT | 1   | C2680 t=0.40      | Ag PLATED      |
| LTR | PART NAME    | QTY | MATERIAL          | REMARK         |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

DCJ-R40AM-165-LF

SERIES LEADFREE  
1.65  $\phi$   
METAL  
A TYPE  
POST 4.0mm  
DIP 90°

DESCRIPTION: