
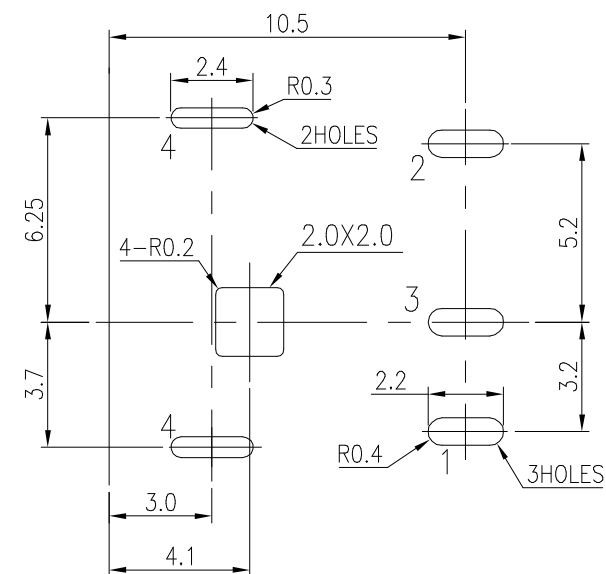
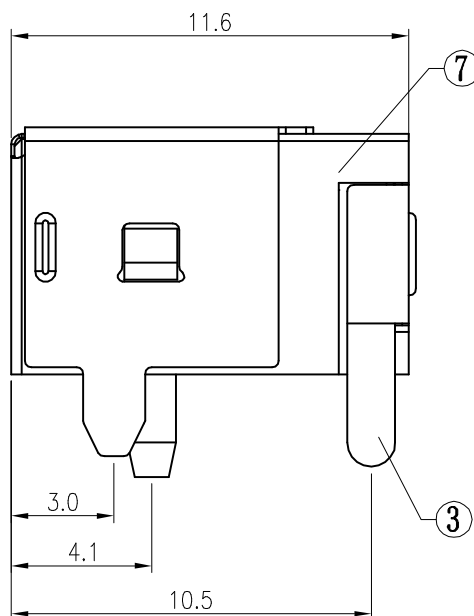


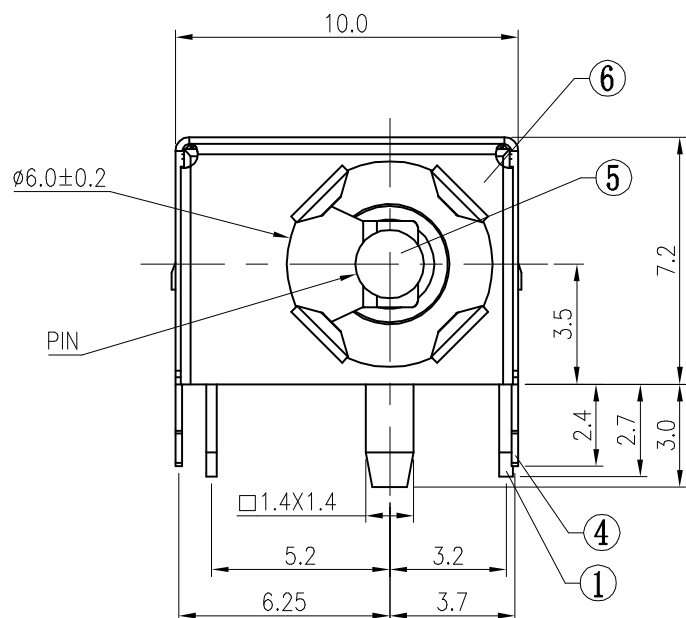

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R40AM-20	$\phi 2.0$	
DCJ-R40AM-25	$\phi 2.5$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

7	HOUSING	1	PBT 4815	UL-94V0(BLACK)
6	SEALED PLATE	1	SUS301 t=0.10	Ni PLATED
5	PIN	1	H59(COPPER ALLOY)	Ni PLATED
4	COAT FOOT	1	C2680 t=0.20	Ni PLATED
3	CURVE PIECE	1	C2680 t=0.30	Ag PLATED
2	SPRING PIECE	1	C5191 t=0.30	Ag PLATED
1	CONTACT FOOT	1	C2680 t=0.40	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R40AM-xx-LF

SERIES
LEADFREE
20:2.00
25:2.50
METAL
A TYPE
POST 4.0mm
DIP 90°

DESCRIPTION: DC POWER JACK