


* Rated voltage/ Rated current : 12V/5A

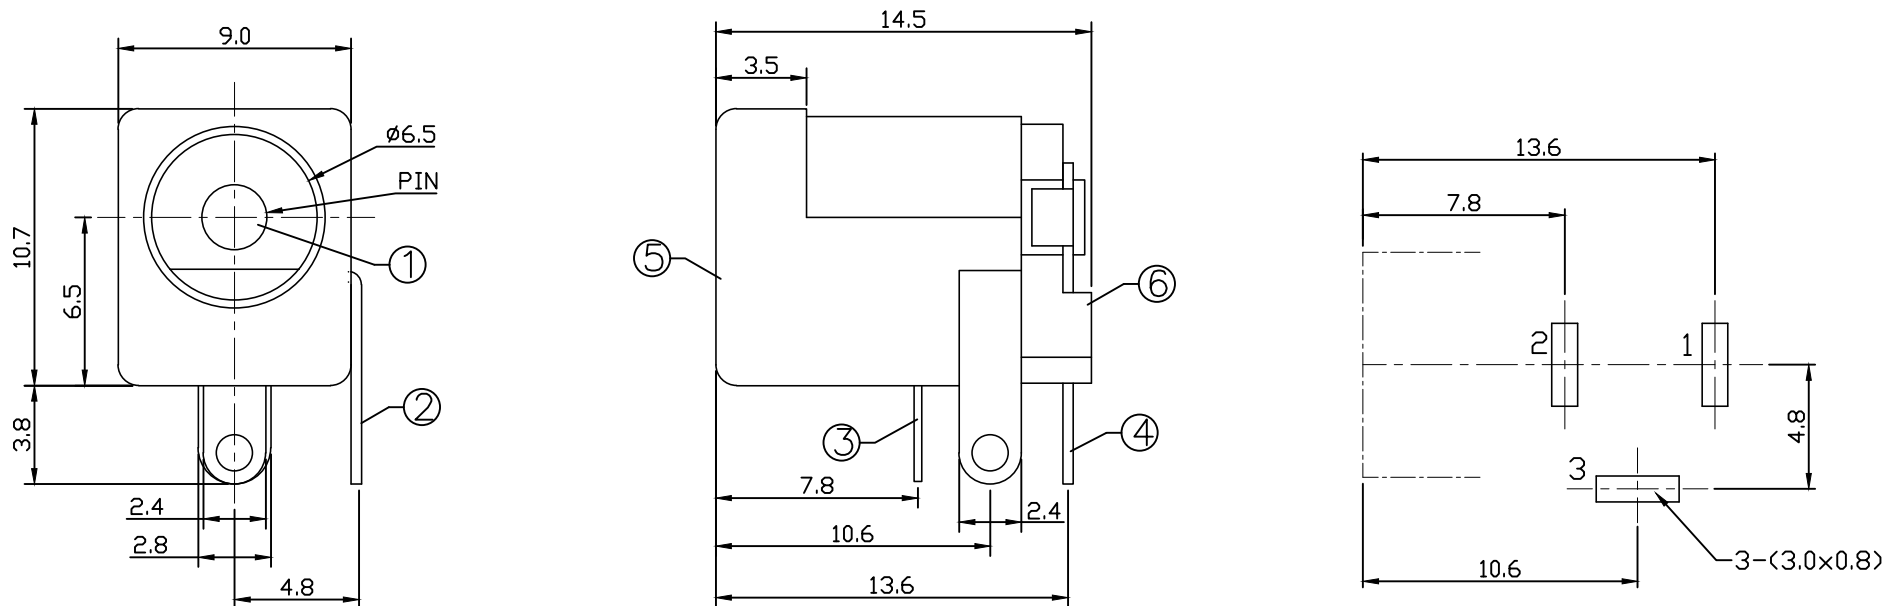

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R5A-20	$\phi 2.0$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

LTR	PART NAME	QTY	MATERIAL	REMARK
6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	FLAT PIECE	1	C2680 t=0.4	Sn PLATED
3	SPRING	1	C5191 t=0.3	Sn PLATED
2	CURVE PIECE	1	C2680 t=0.4	Sn PLATED
1	PIN	1	H59(COPPER ALLOY)	Ni PLATED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm

.X, \pm

.XX, \pm

.XXX, \pm

ANG, \pm

P PROJECTION

照片框

ORDER INFORMATION

DCJ-R5A-20-LF
SERIES | LEADFREE
5A
DIP 90°

DESCRIPTION: DC POWER JACK