
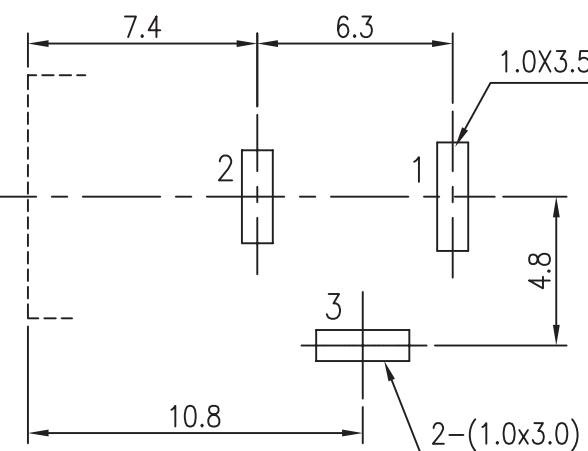
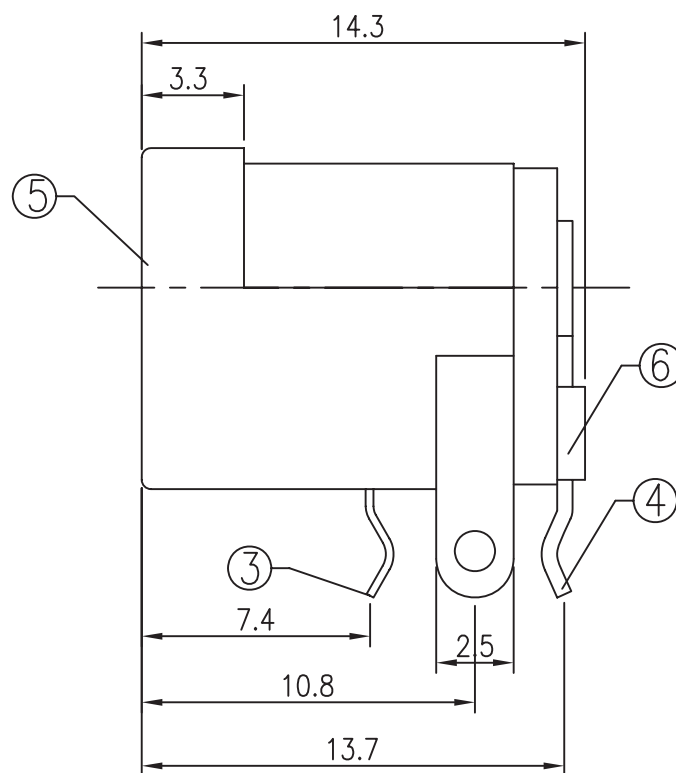


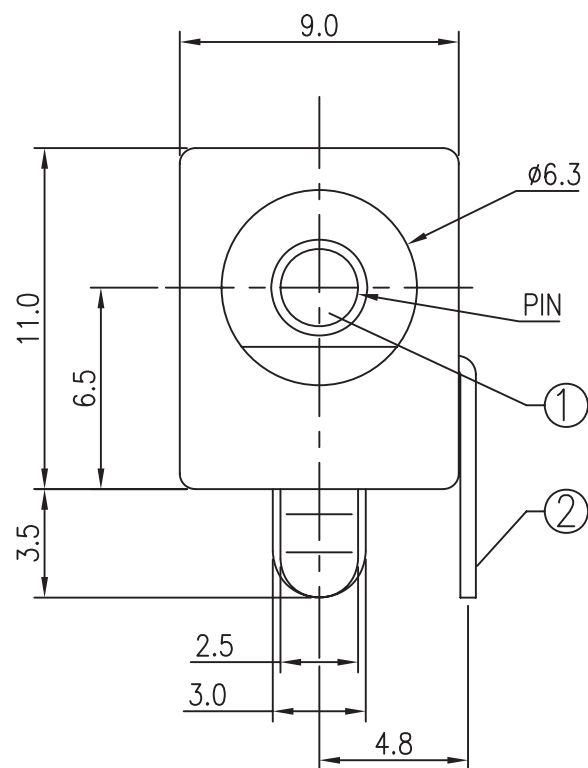

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-RK-20	$\phi 2.0$	1
DCJ-RK-25	$\phi 2.5$	3
		2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-RK-(20)(25)-LF
SERIES
20:2.0 ϕ
25:2.5 ϕ
KINK
DIP 90°
LEADFREE

DESCRIPTION: DC POWER JACK