

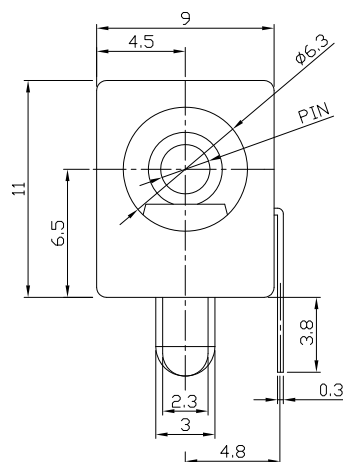
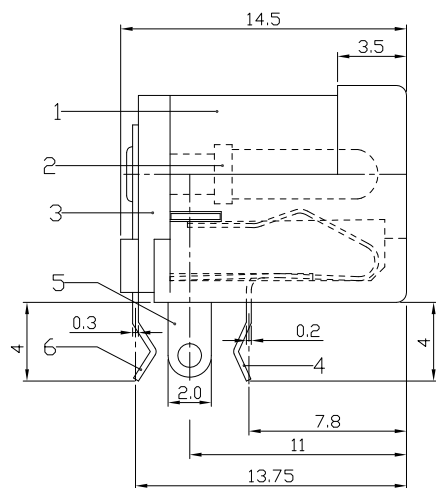





Specification:

- 1.Rating :DC 30V 0.3A.
- 2.Contact resistance : $\leq 100\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (500VDC).
- 4.Withstanding voltage: 500VAC ,
- 5.Insertion and extraction force: 0.3~3Kgs.
- 6.life test: 5000cycles min.
- 7.Operation temperature range:-25°C~85°C



Model No.	H	I	J
CENTER PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$
PLUG O.D.	$2.05^{+0.10}_{-0.00}$	$2.40^{+0.10}_{-0.00}$	$2.55^{+0.10}_{-0.00}$

6	TERMINAL	BRASS STRIP	1	Ag PLATED
5	TERMINAL	BRASS STRIP	1	Ag PLATED
4	SPRING TERMINAL	SUS	1	Ag PLATED
3	COVER	PA66	1	BLACK
2	PLUG PIN	BRASS	1	Ni PLATED
1	CASE	PA66	1	BLACK
NO.	PARTS	MATERIAL	Q'TY	FINISHING

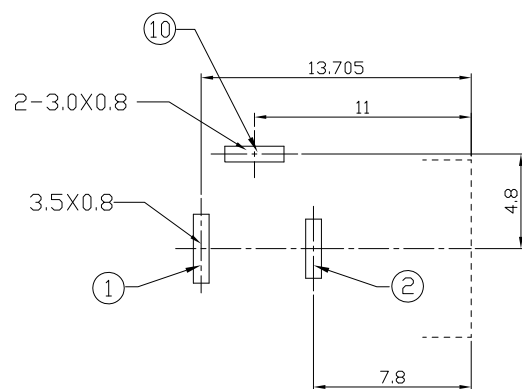

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCJ-RK-xx-LF
SERIES T LEADFREE
20:2.00
235:2.350
25:2.50
KINK
DIP 90°

DESCRIPTION: