


Rated voltage/ Rated current : 24V/ 3A

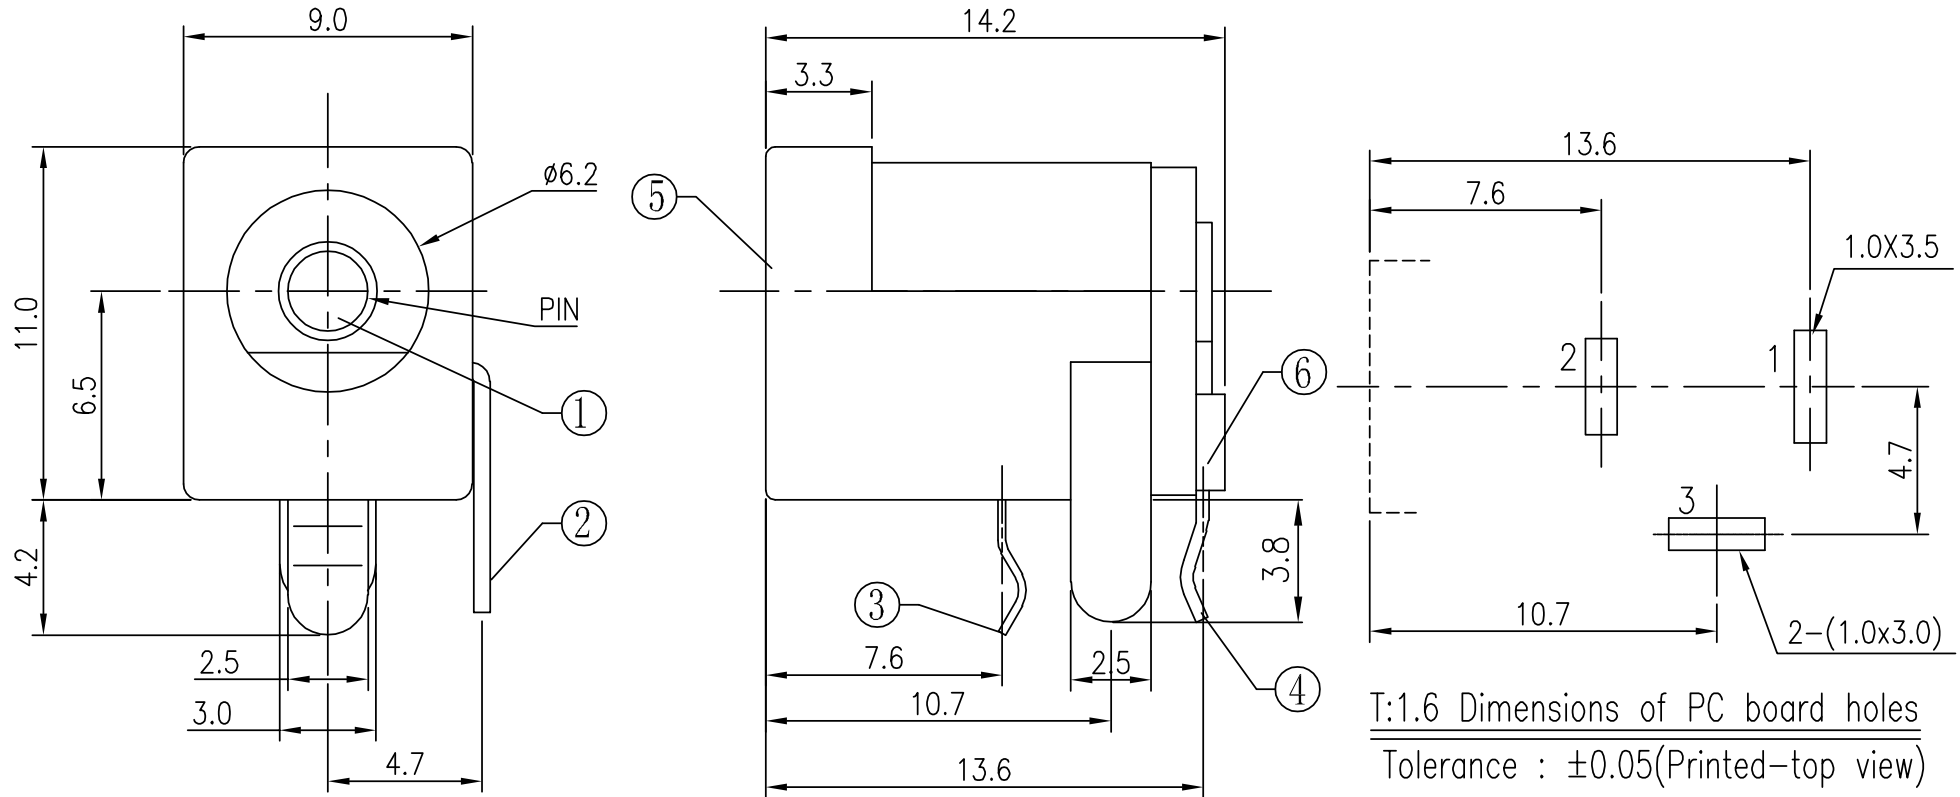

CAT. NO.	PIN	SCHEMATIC
DCJ-RK3A-20	ø2.0	1
DCJ-RK3A-25	ø2.5	3
		2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

LTR	PART NAME	QTY	MATERIAL	REMARK
6	COVER	1	PBT	BLACK
5	HOUSING	1	PBT	BLACK
4	FLAT PIECE	1	C2680 t=0.40	Ag PLATED
3	SPRING	1	C5191 t=0.25	Ag PLATED
2	CURVE PIECE	1	C2680 t=0.40	Ag PLATED
1	PIN	1	H59(COPPER)	Cu/Sn PLATED

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DCJ-RK3A-xx-LF  
SERIES | T LEADFREE  
20:2.00  
25:2.50  
3A  
KINK  
DIP 90°

DESCRIPTION: DC POWER JACK