
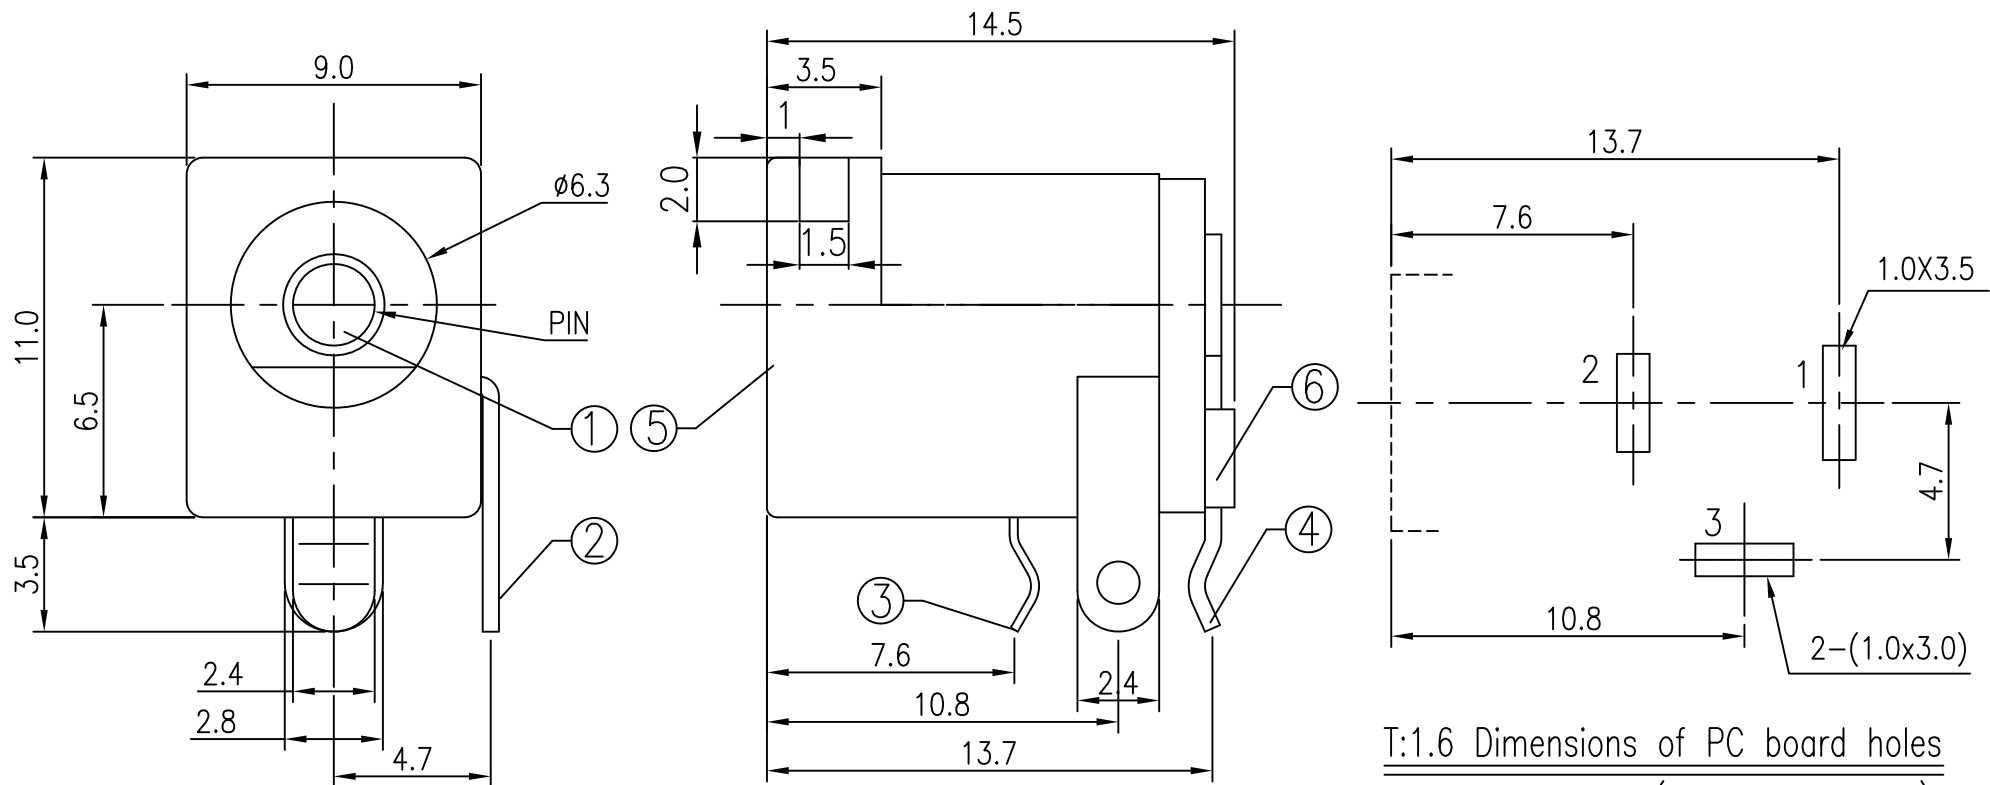






CAT. NO.	PIN	SCHEMATIC
DCJ-RKPC-20	φ2.0	 1
DCJ-RKPC-25	φ2.5	 3
		 2

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	FLAT PIECE	1	C2680 t=0.40	MB:Cu Sn PLATED
3	SPRING	1	C5191 t=0.35	MB:Cu Sn PLATED
2	CURVE PIECE	1	C2680 t=0.40	MB:Cu Sn PLATED
1	PIN	1	H59(COPPER ALLOY)	MB:Cu Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

PPOJECTION 

照片框

ORDER INFORMATION

DCJ-RKPC-xx-LF
SERIES
DIP 90°
KINK
LEADFREE
20:2.00
25:2.50
C TYPE
PANEL

DESCRIPTION: