

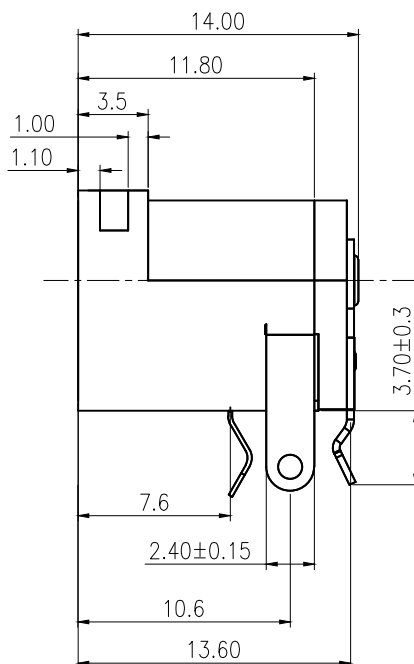
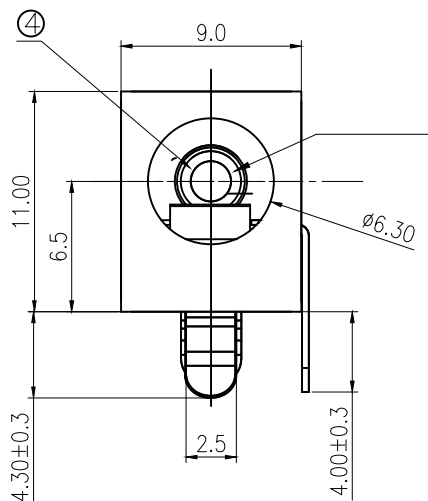
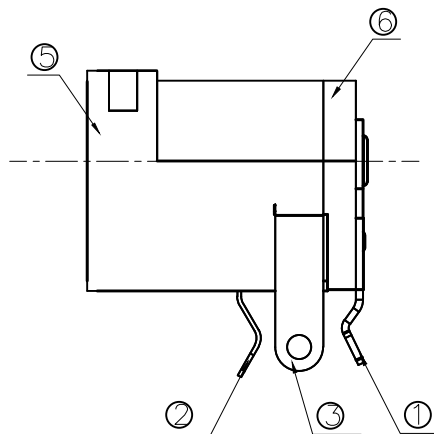


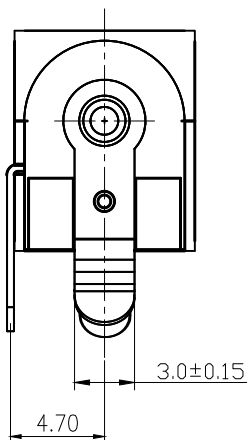

※ Rated voltage/ Rated current :12V 5A

CAT. NO.	PIN	SCHEMATIC
DCJ-RKPC5A-20	Ø2.0	

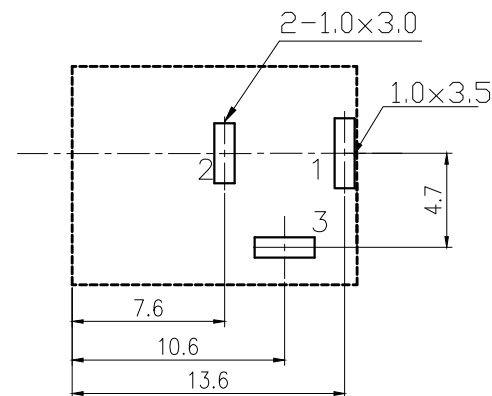

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

6	COVER	1	PBT	BLACK
5	HOUSING	1	PBT	BLACK
4	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
3	CURVE PIECE	1	C2680 t=0.40	Ag PLATED
2	SPRING	1	C5191 t=0.30	Ag PLATED
1	FLAT PIECE	1	C2680 t=0.50	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCJ-RKPC5A-20-LF
SERIES
DIP 90°
KINK
LEADFREE
2.00
5A
C TYPE
PANEL

DESCRIPTION: DC POWER JACK