
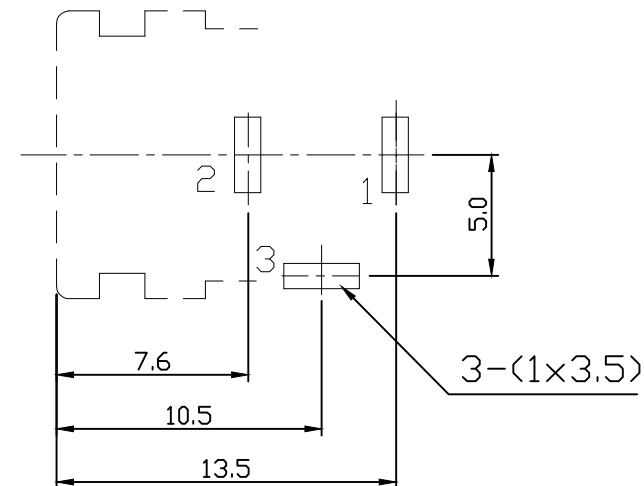
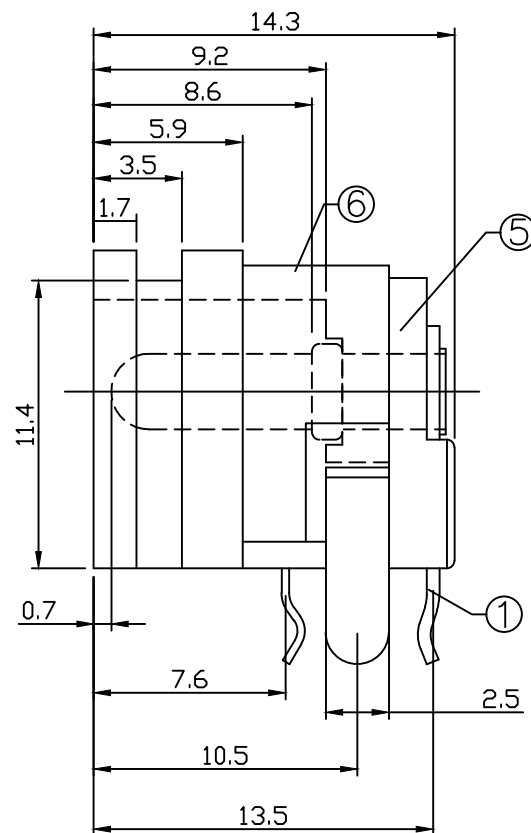


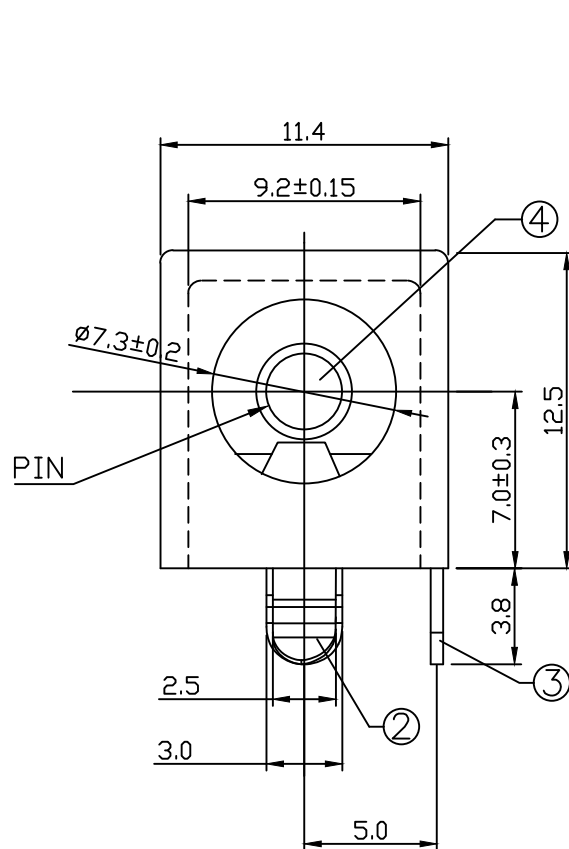

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-RKPN-25	$\phi 2.5$	

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	COVER	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	SHUNT TERMINAL	1	C2680 t=0.50	Ag PLATED
2	TIP SPRING	1	C5191 t=0.25	Ag PLATED
1	CENTER PIN TERMINAL	1	C2680 t=0.50	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-RKPN-25-LF
SERIES | LEADFREE
2.5Ø
PANEL
KINK
DIP 90°

DESCRIPTION: DC POWER JACK