



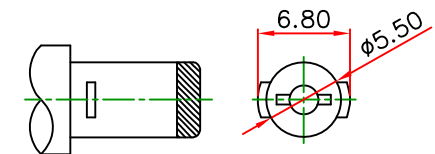
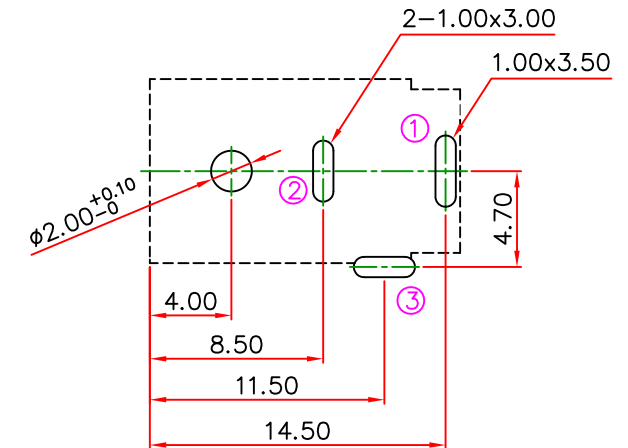
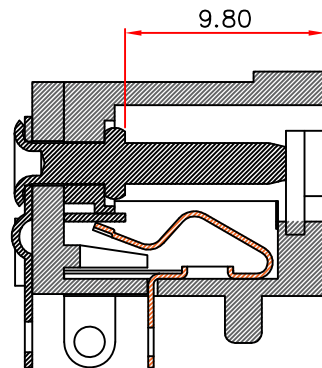


Schematic	 1  3  2
Center Pin	ø2.00mm

RECOMMENDED P.C.B MOUNTING
PATTERN DIMENSION
TOLERANCE: ± 0.05

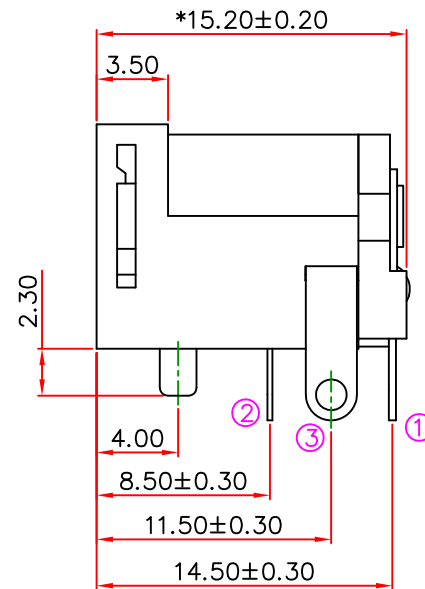

DC Mate plug

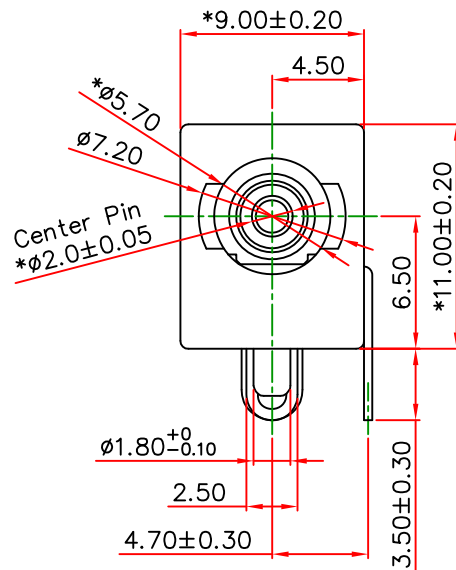

Material :
Terminal 1 : Brass, Sn Plated
Terminal 2 : Copper alloy, Sn Plated
Terminal 3 : Brass, Sn Plated
Center pin : Copper, Ni Plated
Housing : PBT
Cover : PBT
Mark "*" is important dimensions.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 2°

PPOJECTION 

照片框

ORDER INFORMATION

DCJ-RLKP-20-LF
SERIES | | | LEADFREE
2.0Ø
POST
LOCK
DIP 90°

DESCRIPTION: DC POWER SOCKET