


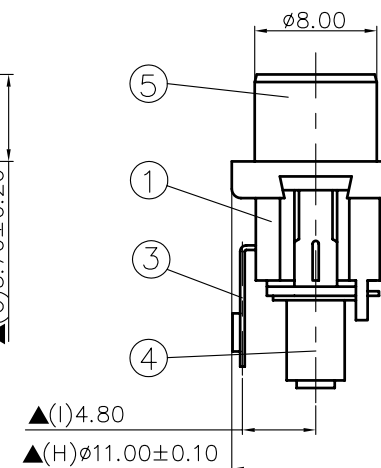
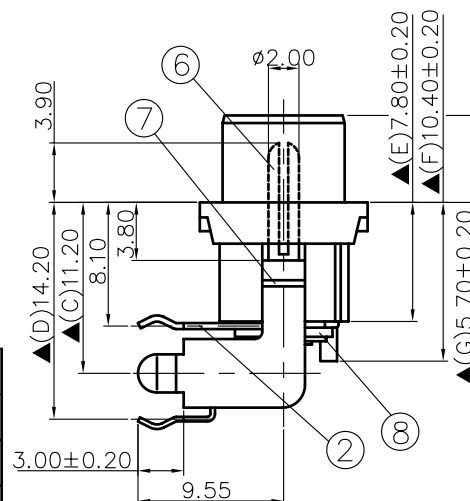


|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| Model No: | C                                                                                 |

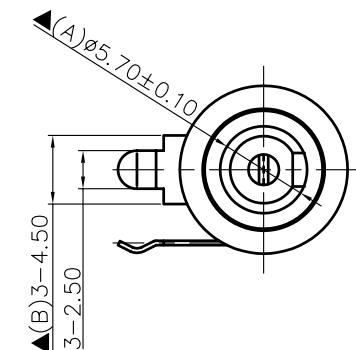

Pin Hole Layout  
(Jack Bottom View)

| 8.  | Insulator B    | Red Vulcanited Fibre | 1   | Red Color     |
|-----|----------------|----------------------|-----|---------------|
| 7.  | Insulator A    | Red Vulcanited Fibre | 1   | Red Color     |
| 6.  | Pin(2.0Ø)      | Brass                | 1   | Nickel Plated |
| 5.  | Bushing        | Brass                | 1   | Nickel Plated |
| 4.  | Pin Terminal   | 0.3T Brass           | 1   | Silver Plated |
| 3.  | Break Terminal | 0.3T Brass           | 1   | Silver Plated |
| 2.  | Sleeve Spring  | 0.4T Phosphor Bronze | 1   | Silver Plated |
| 1.  | Housing        | PBT                  | 1   | Black Color   |
| NO. | Description    | Material             | QTY | Finish        |

#### SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Current Rating : Max 5.0A , 24V DC  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

#### ORDER INFORMATION

DCJ-RPBK-20-LF  
 SERIES : LEADFREE  
 2.0Ø  
 KINK  
 BACK  
 PANEL  
 DIP 90°

DESCRIPTION: