


Pin Hole Layout
(Jack Bottom View)

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

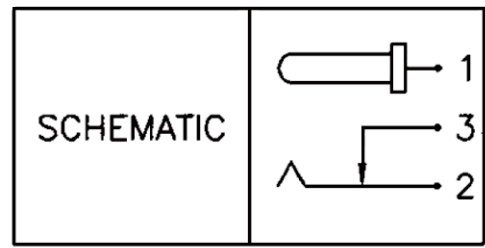

NO	Descripcion	Material	Q'TY	Finish
6	Cover	PBT+Fibre Glass	1	Black Color
5	Housing	PBT+Fibre Glass	1	Black Color
4	Pin(2.0Ø)	Copper	1	Nickel Plated
3	Break Termina	0.4T Brass	1	Silver Plated
2	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1	Pin Terminal	0.4T Brass	1	Silver Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

DCJ-RPE-20-LF
 SERIES | LEADFREE
 2.0Ø
 PANEL EAR
 DIP 90°

DESCRIPTION:

www.morethanall.com

PPOJECTION