
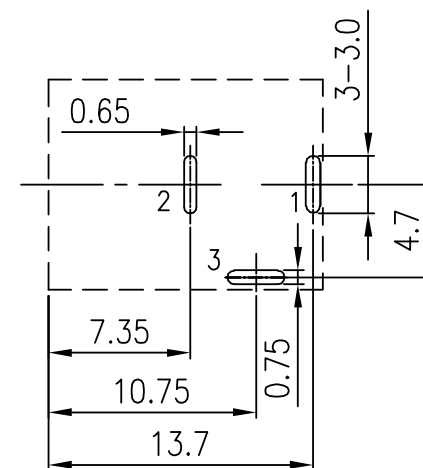
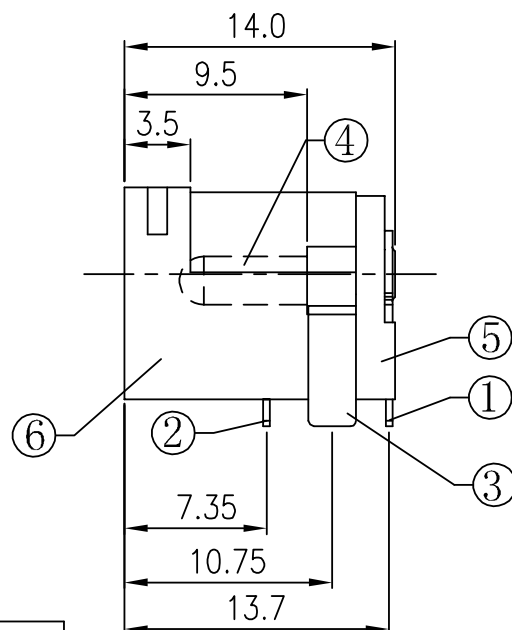
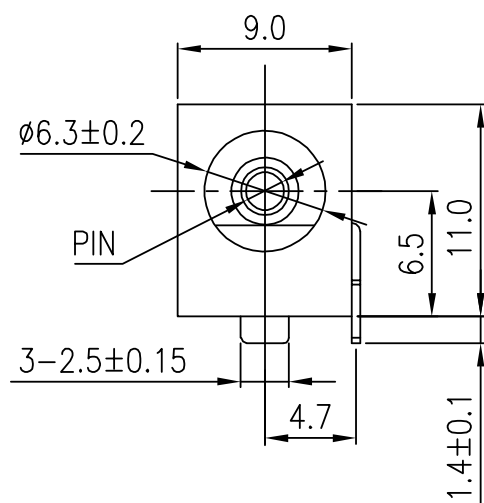
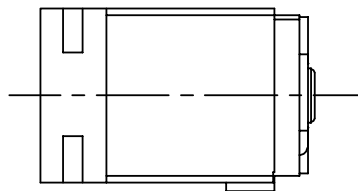




T:1.2 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT NO.	PIN	SCHEMATIC
DCJ-RPU-20	$\phi 2.0$	
DCJ-RPU-25	$\phi 2.5$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	COVER	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	TERMINAL	1	C2680 t=0.35	Ag PLATED
2	TERMINAL	1	C5191 t=0.25	Ag PLATED
1	TERMINAL	1	C2680 t=0.35	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-RPU-xx-LF
SERIES
LEADFREE
20:2.00
25:2.50
U TYPE
PANEL
DIP 90°

DESCRIPTION: DC POWER JACK