

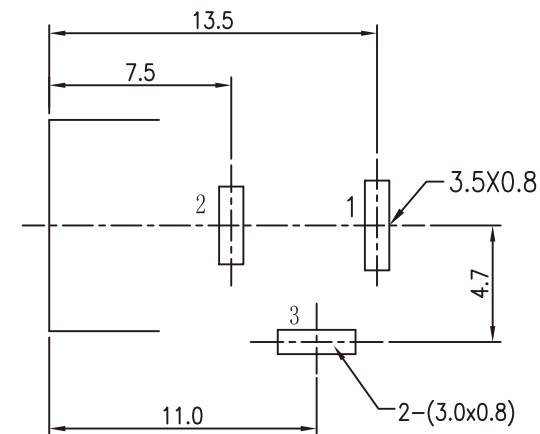
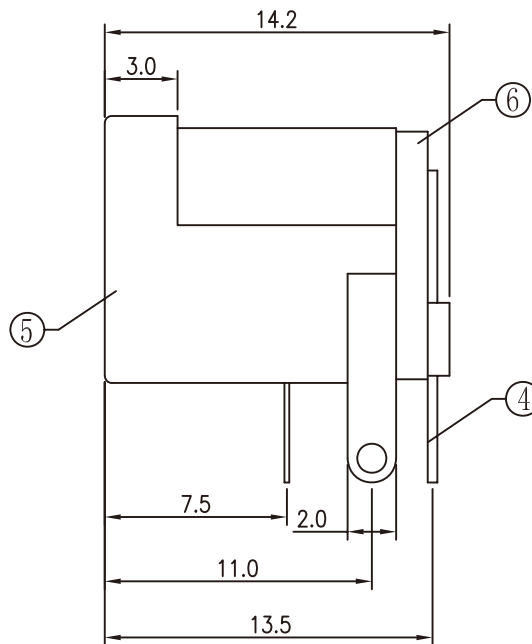


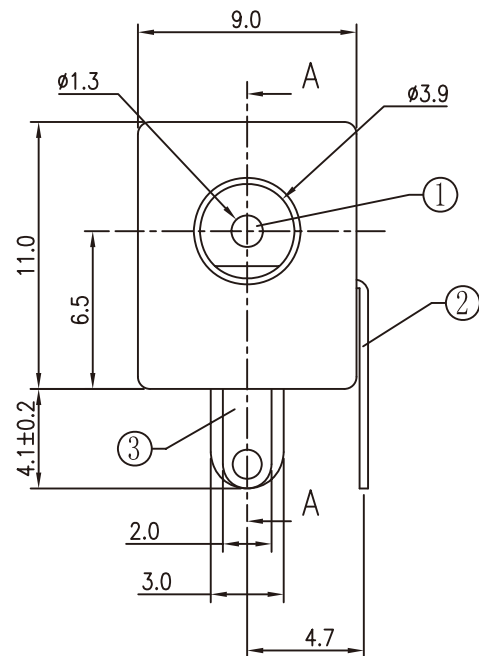


T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

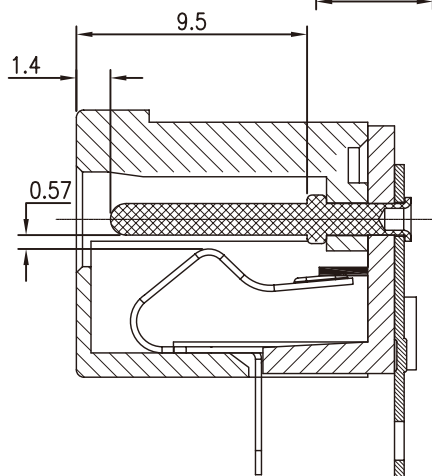

SECTION A-A

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3



6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	FLAT PIECE	1	C2680 t=0.40	Sn PLATED
3	SPRING	1	SUS301 t=0.25	Sn PLATED
2	CURVE PIECE	1	C2680 t=0.35	Sn PLATED
1	PIN	1	H59(COPPER ALLOY)	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-RW9-13-LF
SERIES LEADFREE
1.3Ø
WIDTH 9.0mm
DIP 90°

DESCRIPTION: DC POWER JACK