
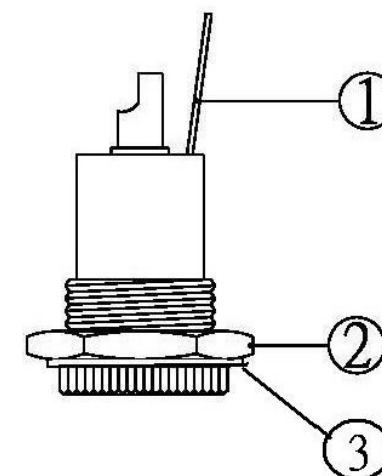
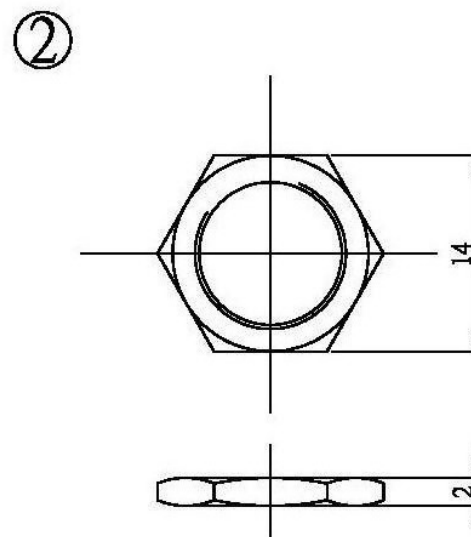
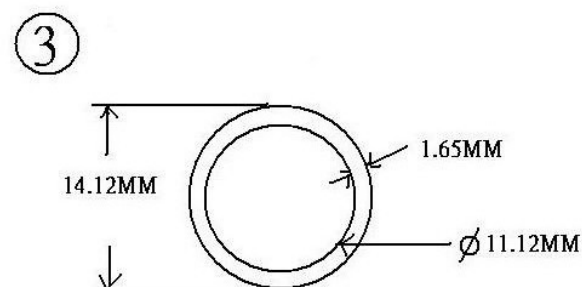


DC500V 100M Ω
AC1000V 1 minute
Rated Voltage And Current:3A

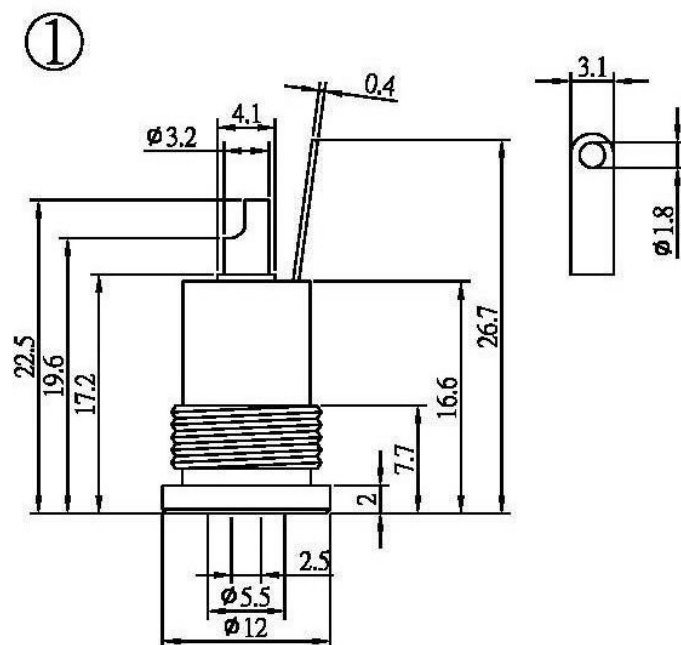

0.5-5M M=±0.2
5-30M M=±0.4
30-120M M=±0.6
120-315M M=±1.0
315-10000M M=±1.6

ITEM	Components 零件部分	Material Article 材料
1	Lug 焊片	Bronze 青銅
2	Center PIN 中心PIN	Bronze 青銅
3	Insulation 絕緣	ABS
4	Outer tube 外管	Copper 銅

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DCJ-SPACNW-25-LF
SERIES | | | | LEADFREE
SOLDER | | | | 2.5Ø
NUT | | | | WASHER
C TYPE | | | | PANEL FRONT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

DESCRIPTION: IN UNE JACK 2.5mm