
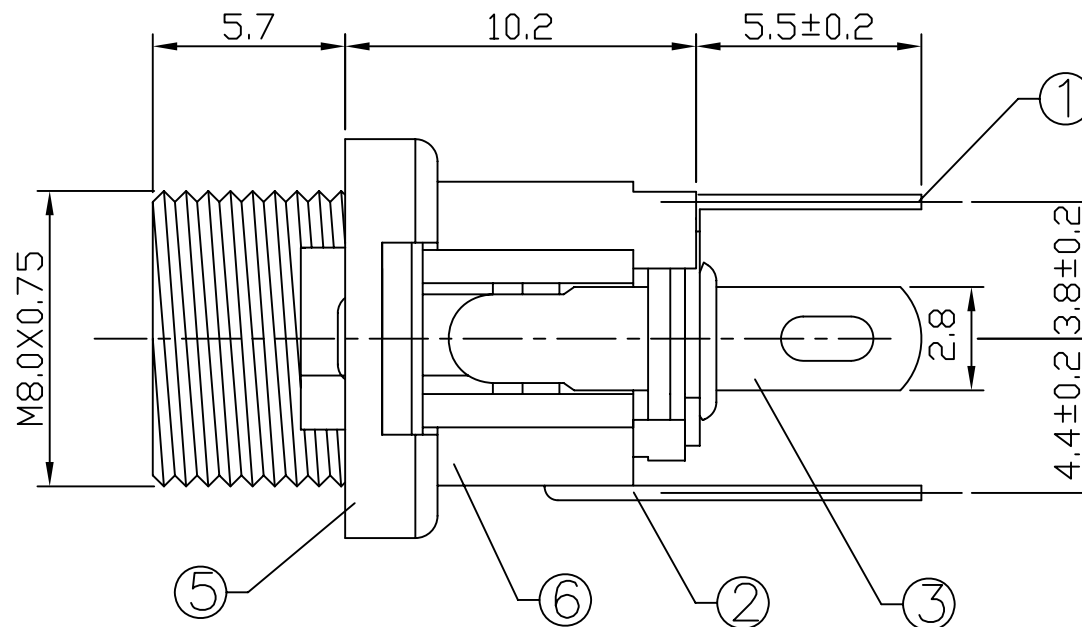


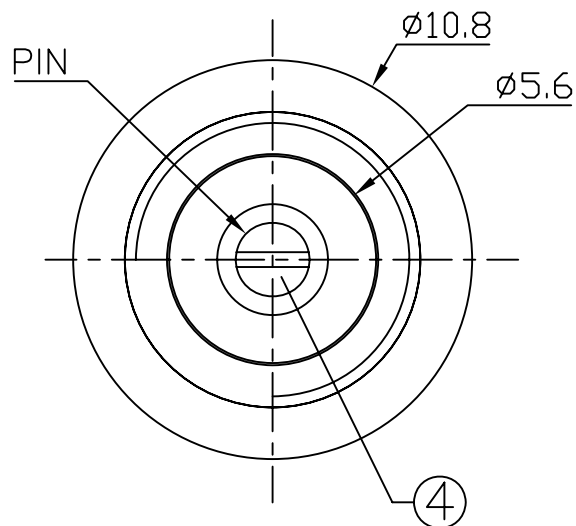

CAT. NO.	PIN	SCHEMATIC
DCJ-SPBT5-20	Ø2.0	
DCJ-SPBT5-25	Ø2.5	

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	AXIS SUPPORT	1	C2680	MB:Cu Ni PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	C5191	MB:Cu Sn PLATED
2	CURVE PIECE	1	C2680	MB:Cu Sn PLATED
1	FLAT PIECE	1	C2680	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

PPOJECTION



ORDER INFORMATION

DCJ-SPBT5-xx-LF

SERIES | | | LEADFREE
20:2.0Ø
25:2.5Ø
SOLDER | | | THREAD 5.6mm
BACK
PANEL

DESCRIPTION: DC POWER JACK