

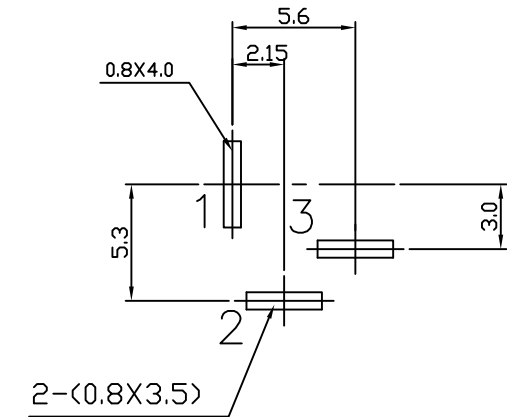
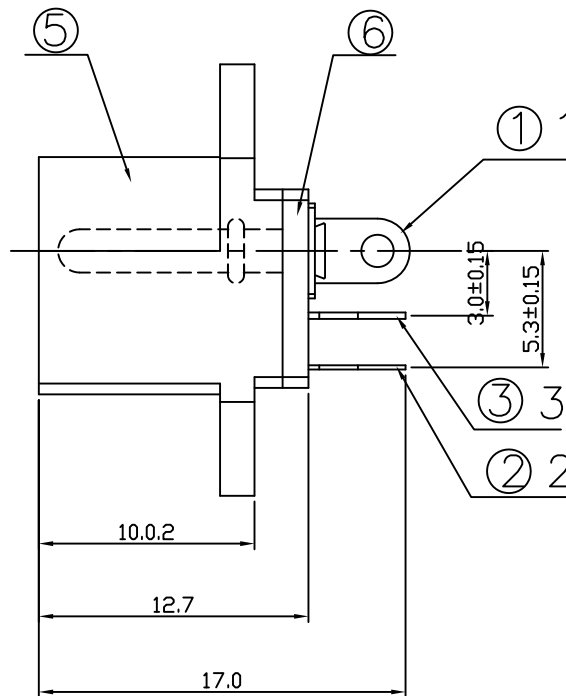


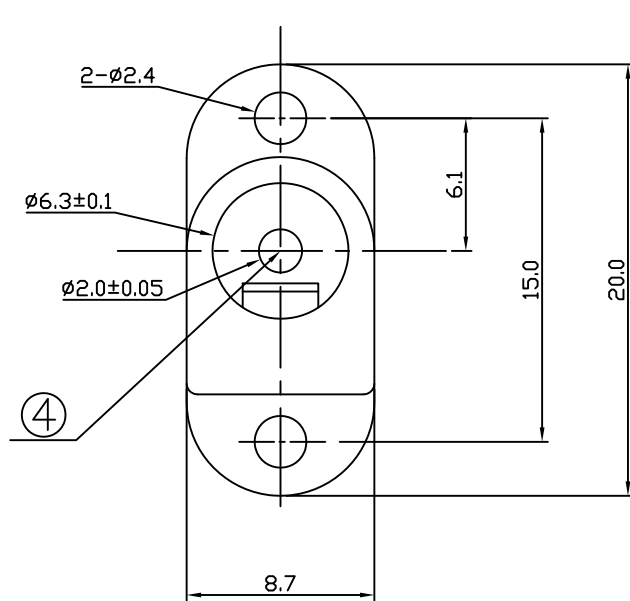

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

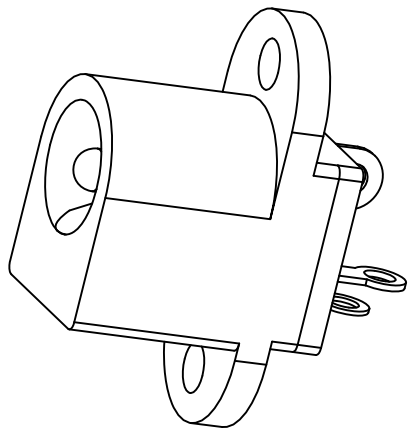

			SCHEMATIC
PIN	A	$\phi 2.0$	

6	COVER	1	PF	
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	C2680	MB:Cu Cu/Sn PLATED
3	TERMINAL	1	C2680 t=0.3	MB:Cu Sn PLATED
2	TERMINAL	1	SUS 301 t=0.2	MB:Cu Sn PLATED
1	TERMINAL	1	C2680 t=0.3	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-SPE16A-20-LF

SERIES T LEADFREE
2.00
CLOSED TOP
16.3mm
PANEL EAR
SOLDER

DESCRIPTION: DC POWER JACK