


T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

6	COVER	1	PA9T	UL-94V0(BLACK)
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	CuSn PLATED
3	TERMINAL	1	C2680 t=0.40	Ag PLATED
2	TERMINAL	1	C5191 t=0.30	Ag PLATED
1	TERMINAL	1	C2680 t=0.40	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

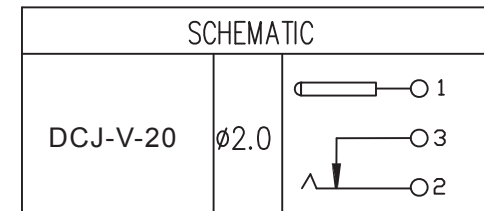

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE


SIZE A4

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

P PROJECTION



ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DC POWER JACK