


RECOMMENDED PLUG




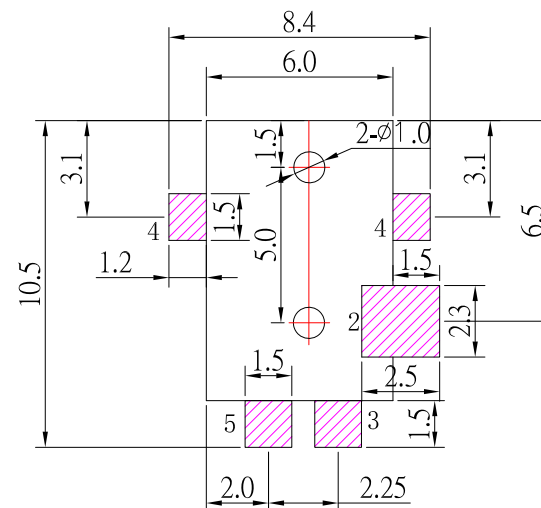


P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 2-20N
- 6.life test : 5,000 cycles .

⑤	PIN	1	BRASS	Ni-Plating
④	CURVE PIECE	1	BRASS	Ag-Plating
③	CURVE PIECE	1	BRASS	Ag-Plating
②	SPRING	1	SUS	Ag-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

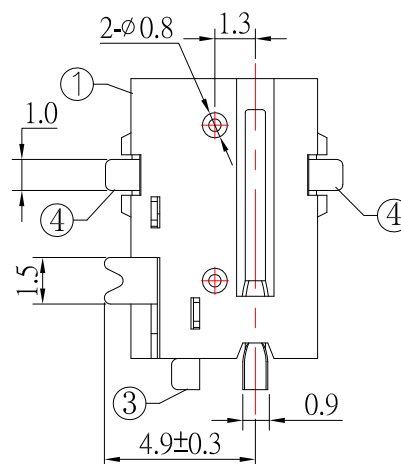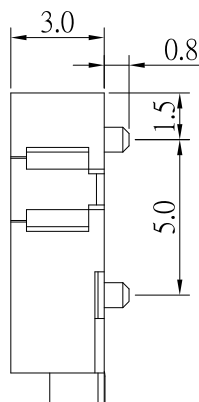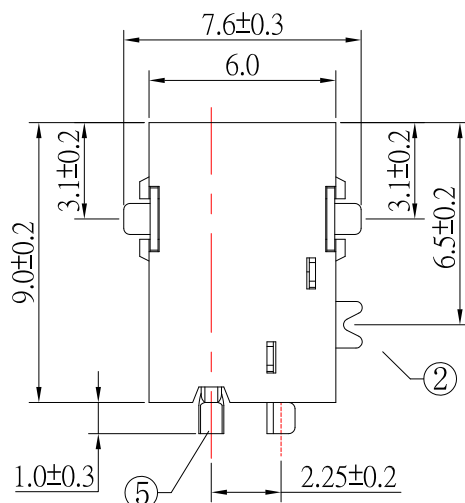

MODEL NO.	DCJ-W15-065
SCHEMATIC	

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DCJ-W15-065-LF
SERIES LEADFREE
0.65Ø
POST 1.5+5.0mm
90°SMT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

DESCRIPTION: DC JACK