


T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

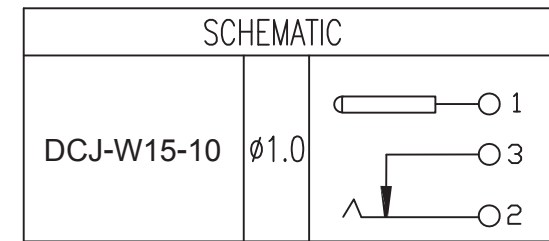

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

| | | | | |
|-----|-------------|-----|-------------------|----------------|
| 5 | HOUSING | 1 | PA9T | UL-94V0(BLACK) |
| 4 | PIN | 1 | H59(COPPER ALLOY) | Cu/Sn PLATED |
| 3 | TERMINAL 3# | 1 | C2680 t=0.25 | Ag PLATED |
| 2 | TERMINAL 2# | 1 | SUS301 t=0.25 | Ag PLATED |
| 1 | TERMINAL 1# | 1 | C2680 t=0.30 | Ag PLATED |
| LTR | PART NAME | QTY | MATERIAL | REMARK |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. \pm
X. \pm
.XX \pm
.XXX \pm
ANG \pm

PJECTION

照片框

ORDER INFORMATION

DCJ-W15-10-LF
SERIES | LEADFREE
1.0 ϕ
POST 1.5+5.0mm
90°SMT

DESCRIPTION: