
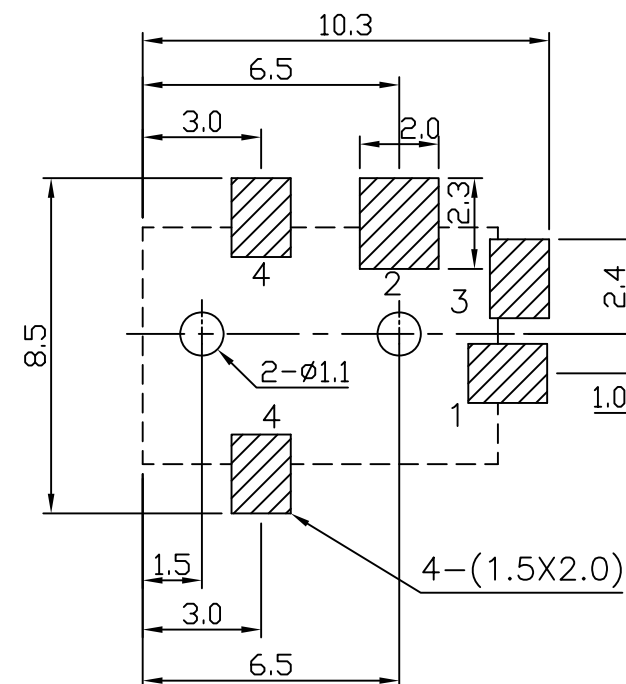
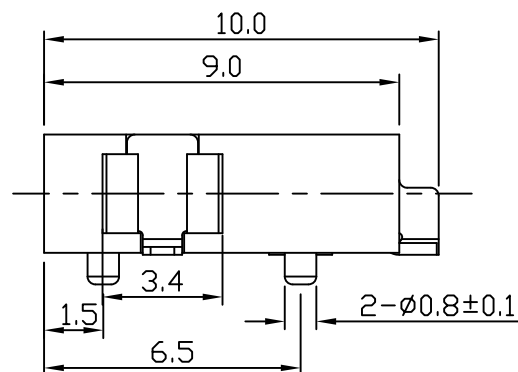
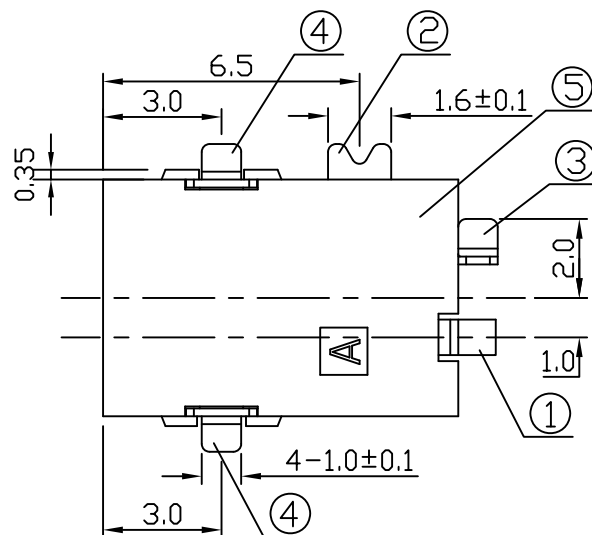



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

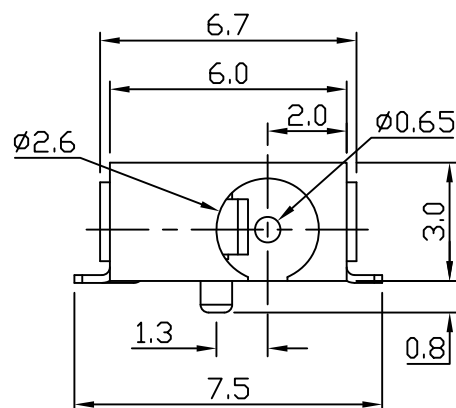

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	TERMAINL	2	C2680 t=0.20	Ag PLATED
3	TERMINAL 3#	1	C2680 t=0.20	Ag PLATED
2	TERMINAL 2#	1	C5191 t=0.20	Ag PLATED
1	TERMINAL 1#	1	H59(COPPER ALLOY)	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

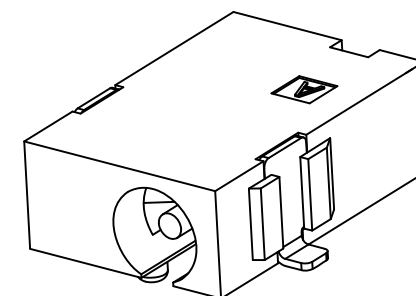

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DCJ-W15R-065-LF
 SERIES REEL LEADFREE
 0.650
 POST 1.5+5.0mm
 90°SMT

DESCRIPTION: DC POWER JACK

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4



PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

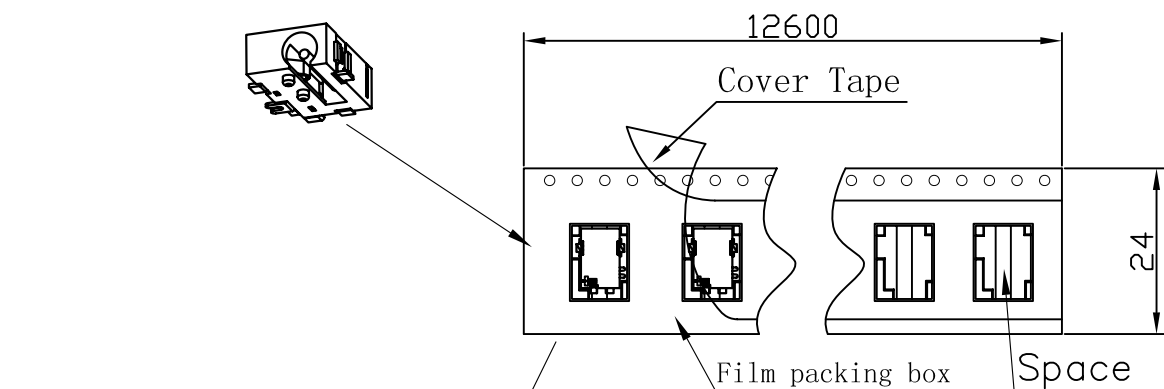

1000pcs X 1 = 1000pcs

Embossed Carrier Reel

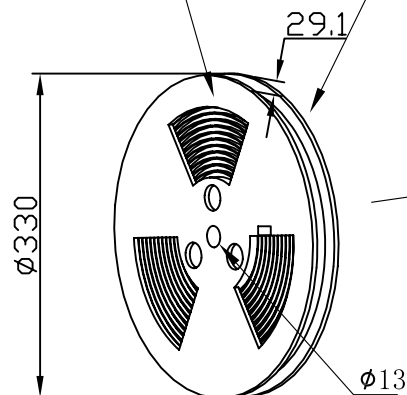


1000pcs X 13 = 13000pcs

淨重:3.0kg

毛重:8.5kg

單位:mm

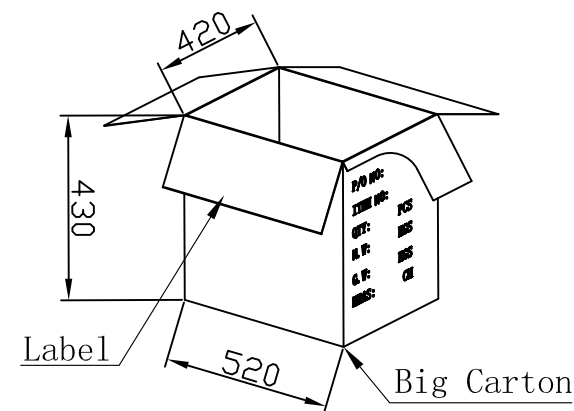

13000pcs X 1 = 13000pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-W15R-065-LF

SERIES

LEADFREE

0.65Ø

REEL

POST 1.5+5.0mm

90°SMT

DESCRIPTION: DC POWER JACK