
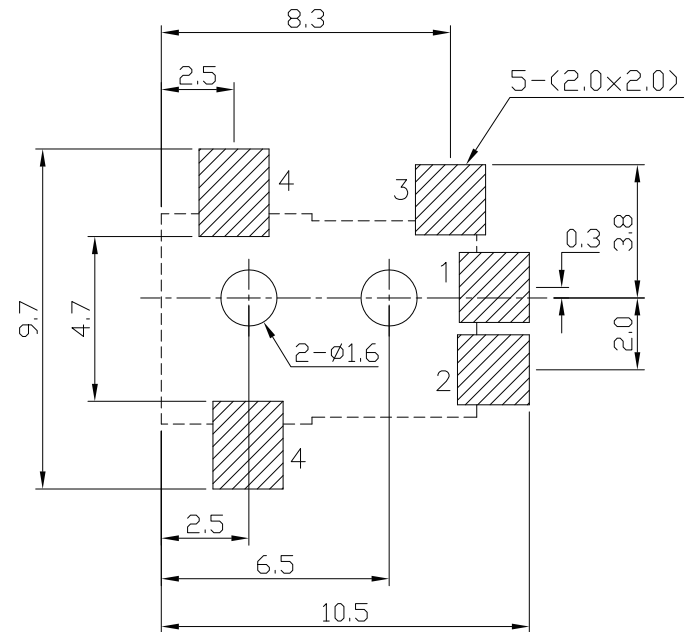
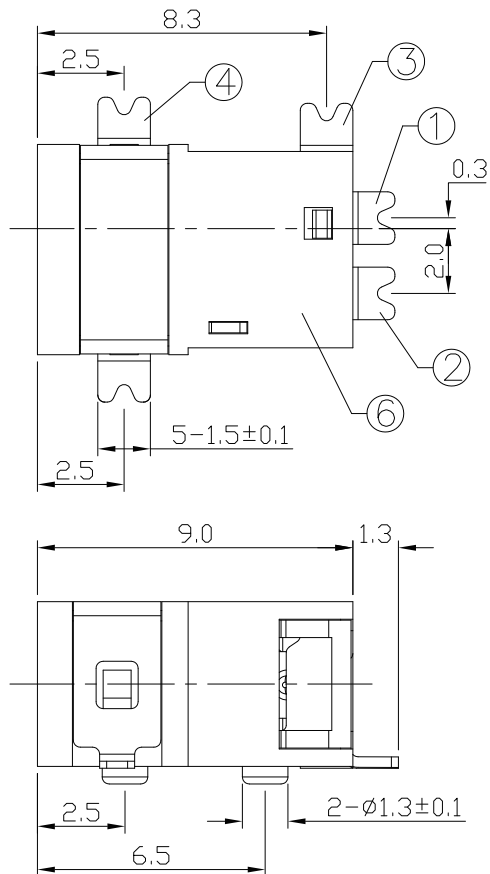
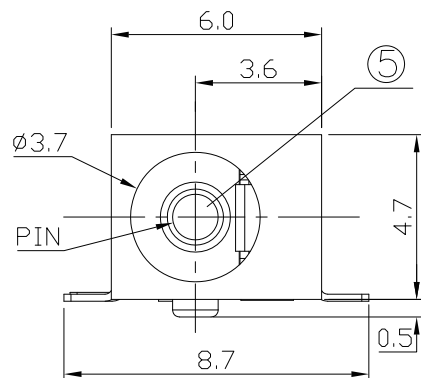


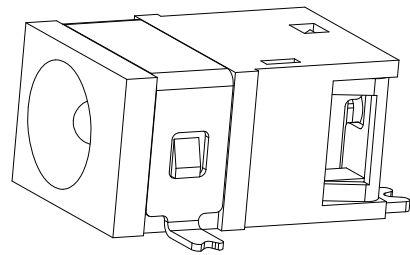

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-W24H4-10	$\phi 1.0$	
DCJ-W24H4-13	$\phi 1.3$	

LTR	PART NAME	QTY	MATERIAL	REMARK
6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	PIN	1	H59(COPPER ALLOY)	MB:Cu Sn PLATED
4	TERMINAL	1	C2680 t=0.25	MB:Ni Ag PLATED
3	CURVE PIECE	1	C2680 t=0.25	MB:Ni Ag PLATED
2	SPRING FOOT	1	C5191 t=0.30	MB:Ni Ag PLATED
1	CONTACT FOOT	1	C2680 t=0.25	MB:Ni Ag PLATED

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-W24H4-xx-LF
SERIES | LEADFREE
10:1.00
13:1.30
HIGH 4.7mm
POST 2.5+4.0mm
90°SMT

DESCRIPTION: