
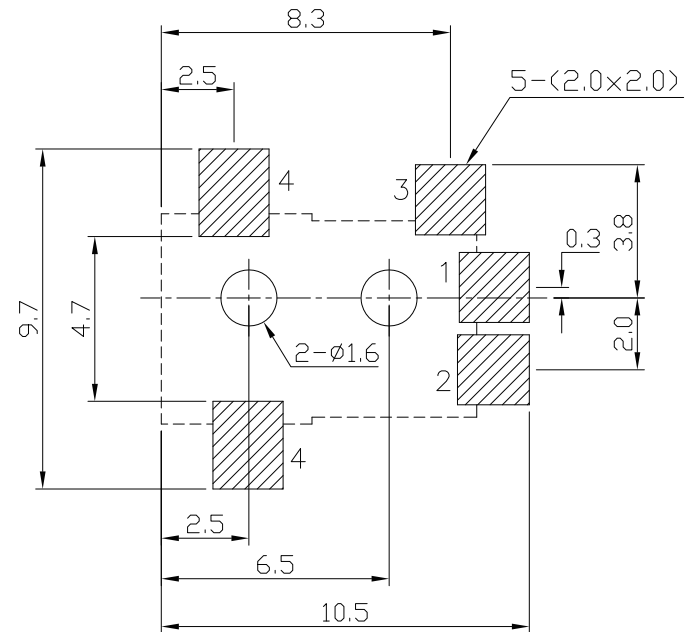
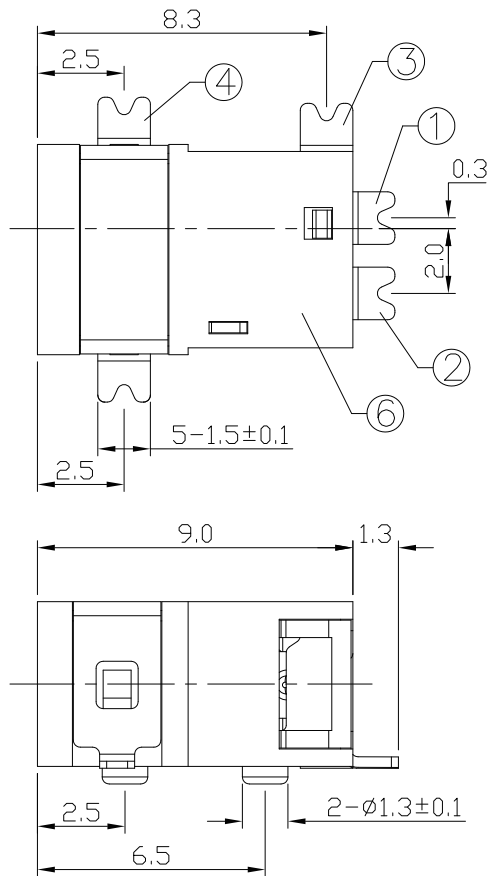
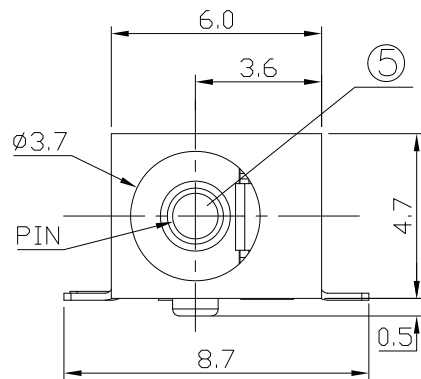


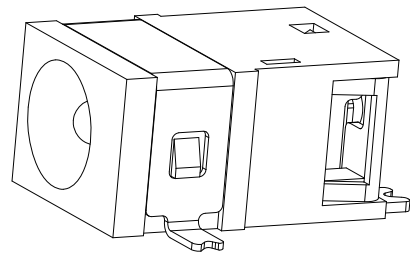

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-W24H4R-10	$\phi 1.0$	
DCJ-W24H4R-13	$\phi 1.3$	

LTR	PART NAME	QTY	MATERIAL	REMARK
6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	PIN	1	H59(COPPER ALLOY)	MB:Cu Sn PLATED
4	TERMINAL	1	C2680 t=0.25	MB:Ni Ag PLATED
3	CURVE PIECE	1	C2680 t=0.25	MB:Ni Ag PLATED
2	SPRING FOOT	1	C5191 t=0.30	MB:Ni Ag PLATED
1	CONTACT FOOT	1	C2680 t=0.25	MB:Ni Ag PLATED

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$


PPOJECTION

照片框

ORDER INFORMATION

DCJ-W24H4R-xx-LF
SERIES | LEADFREE
10:1.00
13:1.30
REEL
HIGH 4.7mm
POST 2.0+4.0mm
90°SMT

DESCRIPTION:

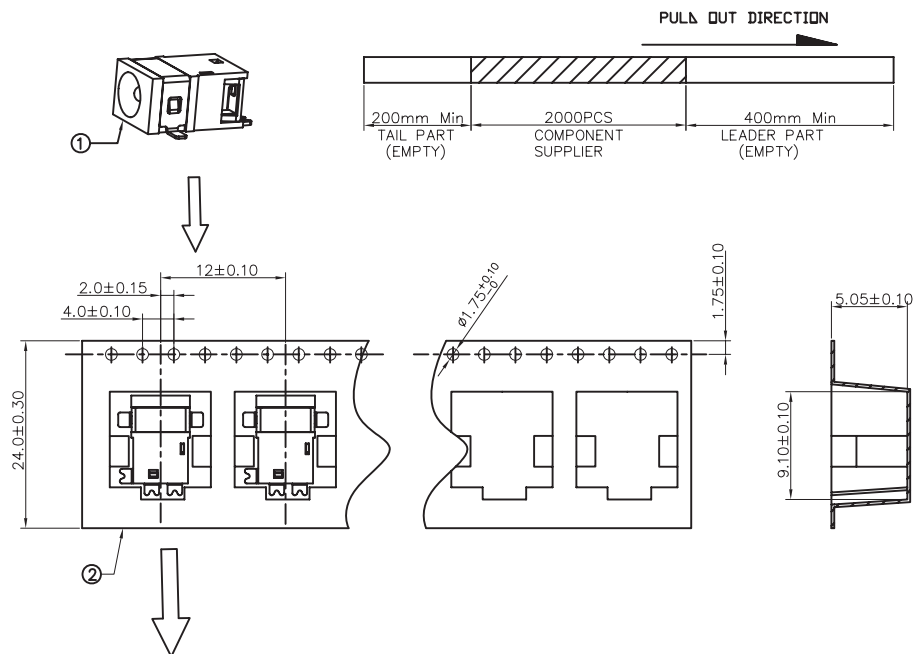

1.包裝方式:

- 1.1. 使用半自動包裝機,先將CARRY TAPE 送入導軌中,并与COVER TAPE 貼合在上面,其中初始400mm Min空槽不要放產品,然後將產品如圖所示方向依次放入CARRY TAPE內,每個槽放1PCS,每REEL共包裝產品1000PCS,最後需留200mm Min空槽不放產品.
- 1.2. 用膠帶將CARRY TAPE粘在一起,外圍再用塑膠帶(電周波)纏繞一圈,按客戶要求在REEL上貼上LABEL,注明料號,日期,數量.
- 1.3. 如圖示,將裝好的REEL裝入PEW袋內,再將其放入CARTON內,最後用膠帶封箱,并在紙箱外相應的地放貼上標籤.

注意:

1. 防止漏裝,禁止碰歪產品錫腳;
2. 產品在 CARRY TPAB中的方向須如圖所示(BOSS的方向)


2.BOM.

NO.	NAME	SPEC.	
①	DCJ-W24H4 系列	Q'TY	
②	CARRY TAPE	PS,W=24mm,R=12mm	
③	COVER TAPE	PE,W=21.3mm,R=600mm	
④	REEL	$\phi 330mm,H=29.1mm$	
⑤	Plastic Bag	1000*1100,T=0.05mm	1PCS
⑥	CARTON	400*350*340 (INNER DIM.)	27PCS

Net weight:5Kg

Total weight: 10.5Kg

單位:mm

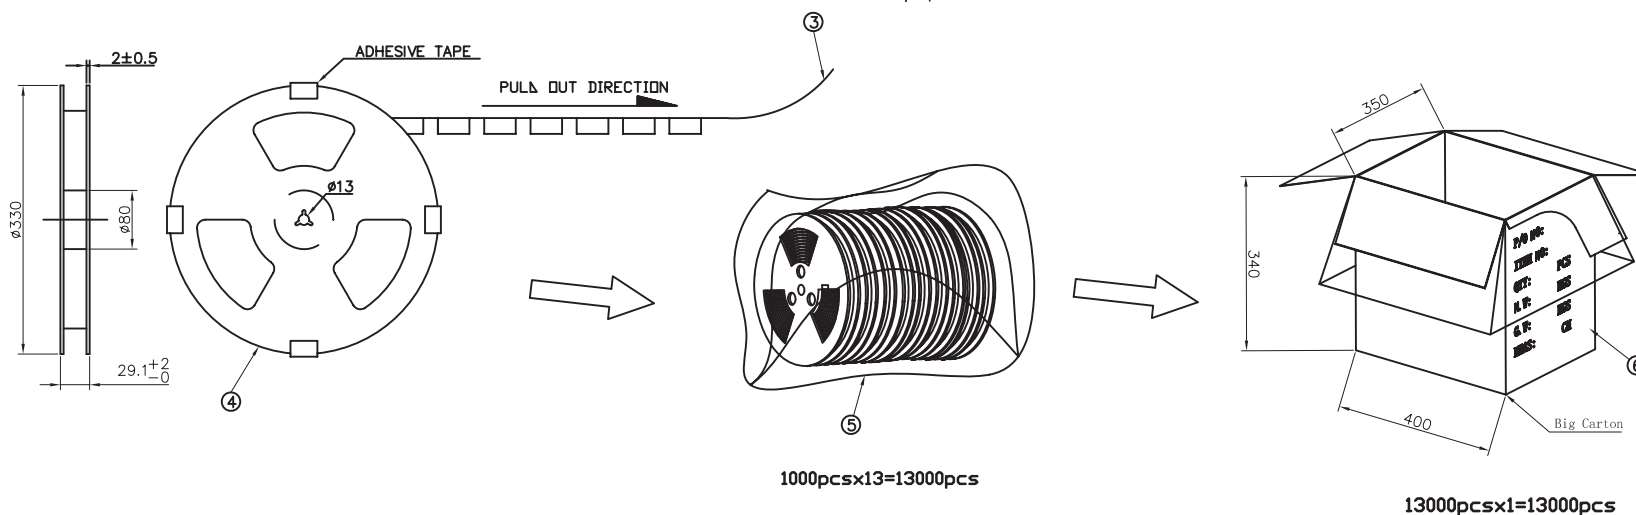

1000pcs x 13 = 13000pcs

13000pcs x 1 = 13000pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

DCJ-W24H4R-xx-LF
SERIES | LEADFREE
10:1.00
13:1.30
REEL
90°SMT
HIGH 4.7mm
POST 2.0+4.0mm

DESCRIPTION: