

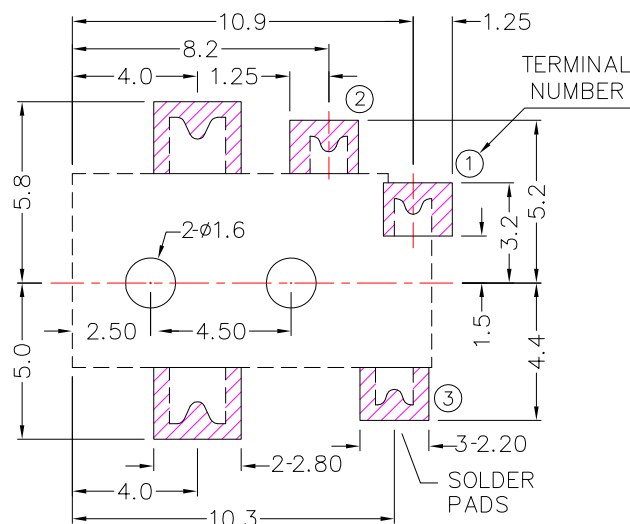
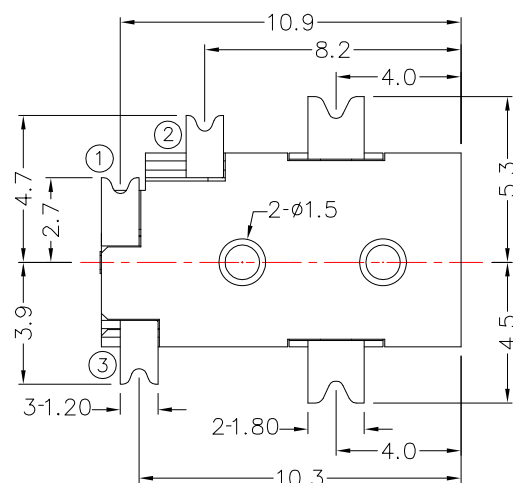

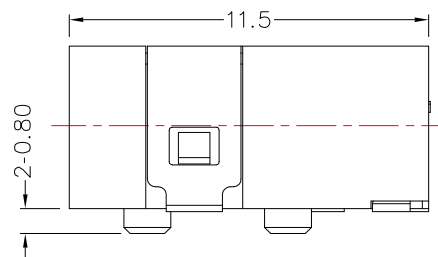
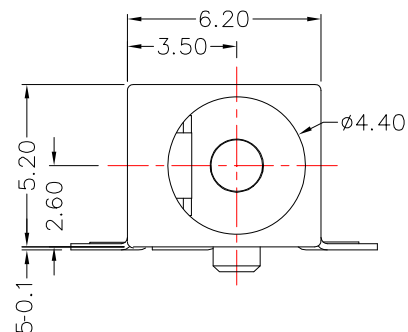


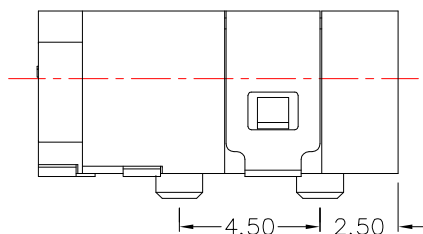

RECOMMENDED
SOLDER PAD LAYOUT



DC MATE PLUG

MODEL NO.	
SCHEMATIC	
CENTER PIN	1.65mm

*MATERIAL

TERMINAL 1 : BRASS
 TERMINAL 2 : PHOSPHOR BRONZE
 TERMINAL 3 : BRASS
 SHIELD : PHOSPHOR BRONZE
 COVER : PA6T

SPECIFICATION

1. Rating : DC 16V 2.5A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ± 0.2
 Above 5 ~ 30 ± 0.3
 Above 30 ~ 50 ± 0.4
 Above 50 ± 0.5
 Angle $\pm 0.3^\circ$

照片框

ORDER INFORMATION

DCJ-W24H5-165-LF
 SERIES LEADFREE
 1.650
 HIGH 5.2mm
 POST 2.5+4.5mm
 90°SMT

DESCRIPTION: DC JACK