

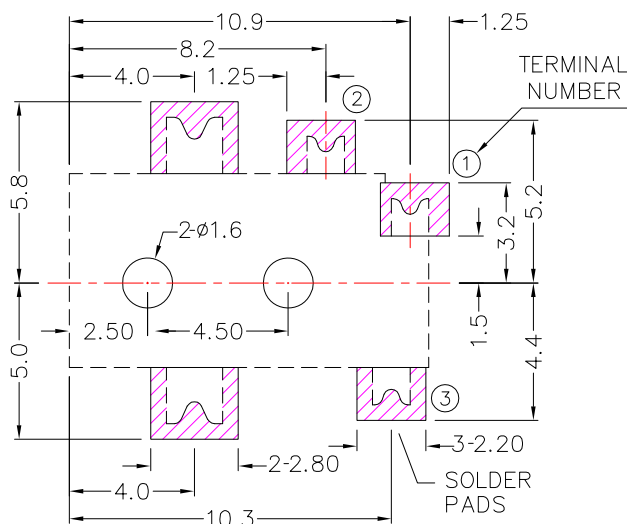
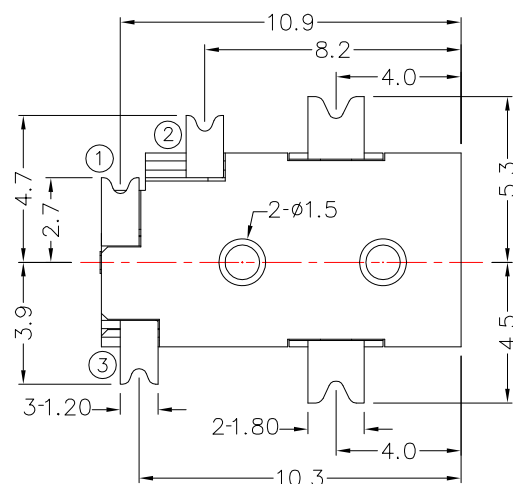

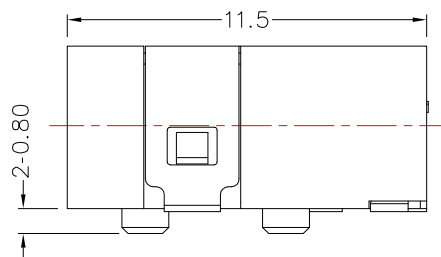
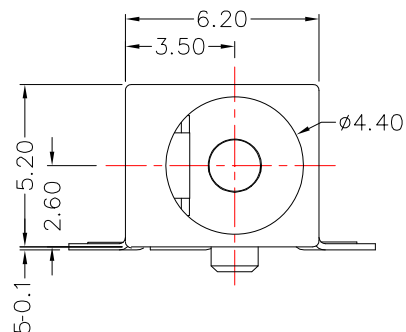


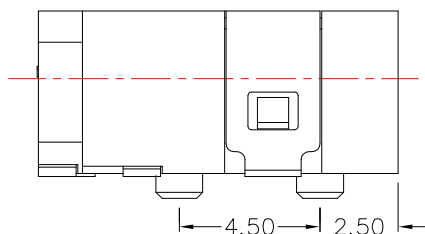

RECOMMENDED
SOLDER PAD LAYOUT



DC MATE PLUG

MODEL NO.	
SCHEMATIC	
CENTER PIN	ø1.65mm

*MATERIAL

TERMINAL 1 : BRASS
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : BRASS
SHIELD : PHOSPHOR BRONZE
COVER : PA6T

SPECIFICATION

1. Rating : DC 16V 2.5A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

DCJ-W24H5R-165-LF
SERIES REEL LEADFREE
1.650
HIGH 5.2mm
POST 2.5+4.5mm
90°SMT

DESCRIPTION: DC JACK

