
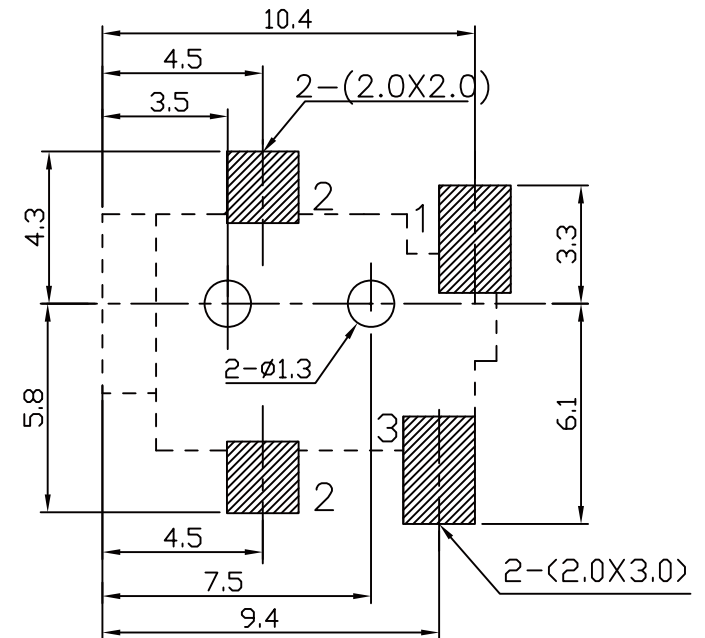


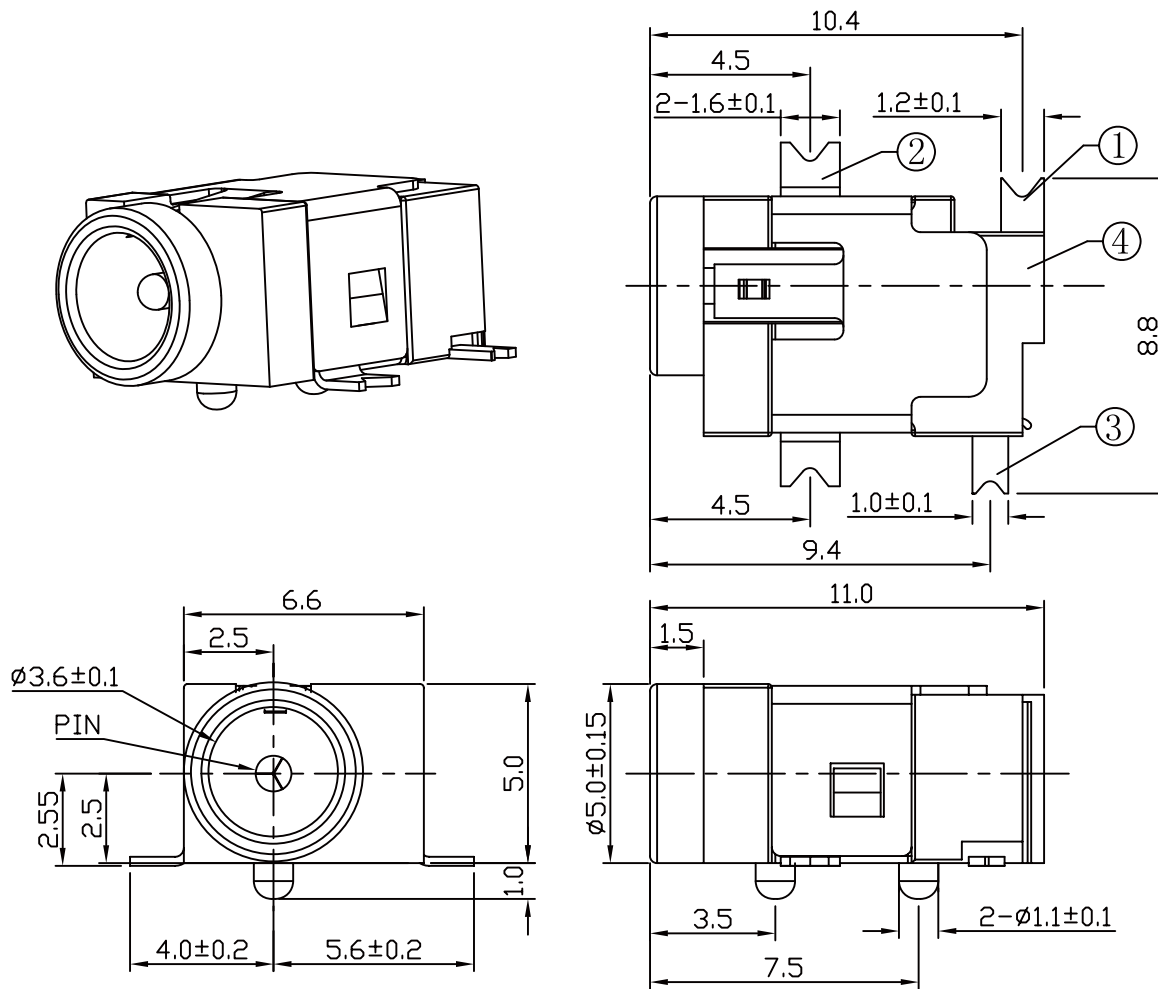

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

SCHEMATIC		
DCJ-W24R-10	$\phi 1.0$	3
DCJ-W24R-13	$\phi 1.3$	1
		2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

4	HOUSING	1	PA9T	UL-94V0(BLACK)
3	CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
2	CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
1	PIN FOOT	1	C2680	t=0.20 Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION



ORDER INFORMATION

DCJ-W24R-xx-LF
SERIES | | LEADFREE
10:1.0Ø
13:1.3Ø
REEL
POST 2.0+4.0mm
90°SMT

DESCRIPTION: DC POWER JACK

1 Space=1 pcs

1 Film packing box=1×500pcs
=500pcs

1 Big Carton=13×500pcs=6500pcs

1 Film packing box Dimension
=L×W×H
=8600×24×6.8

The thickness of the film=0.4mm

1 Embossed Carrier Reel Dimension
=D×H
=330×29.1

1 Cover tape Dimension
=L×W×H
=8600×21.3×0.06

1 Plastic Bag Dimension
=L×W×D
=1000×1100×0.06

1 Big Carto Dimension
=L×W×H
=400×350×340



Unit:mm

Packing temperature request:
105℃~115℃

Net weight:3.5Kg

Total weight:9.0Kg

單位:mm

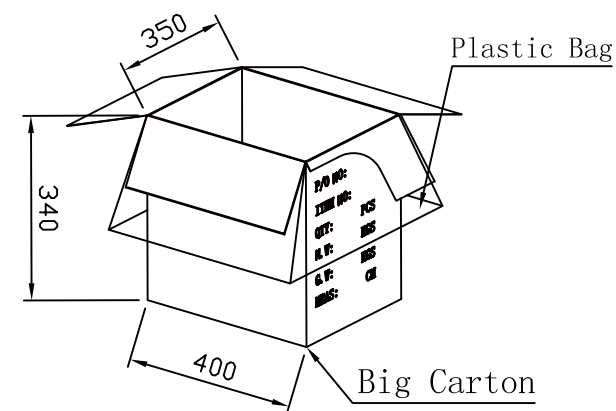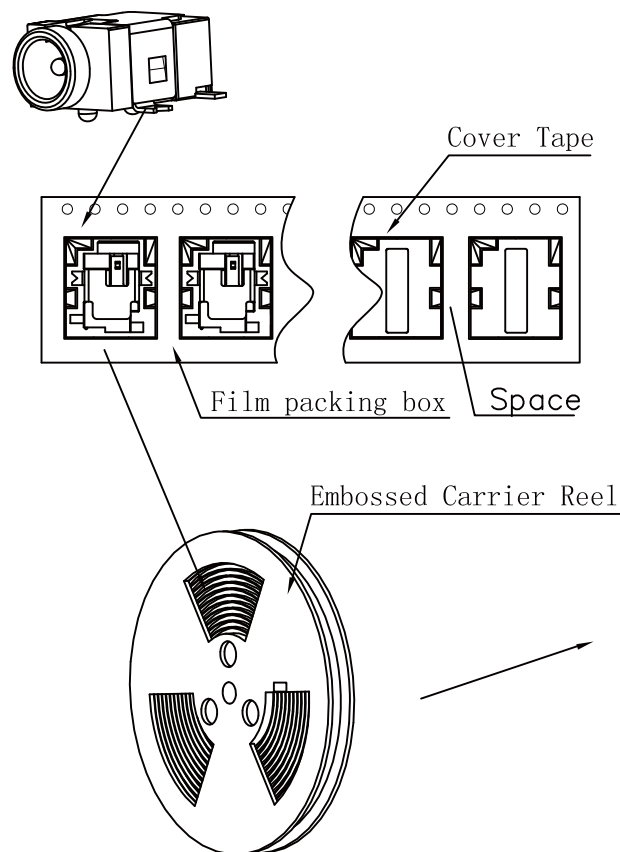

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

DCJ-W24R-xx-LF

SERIES | | | LEADFREE
10:1.0Ø
13:1.3Ø
REEL
POST 2.0+4.0mm
90°SMT

DESCRIPTION: