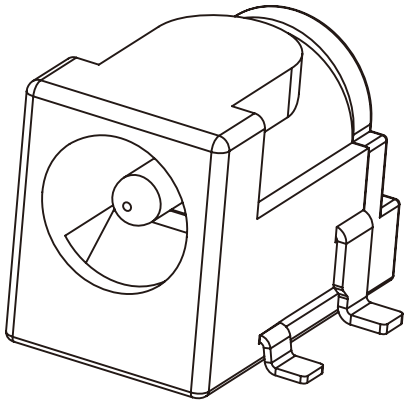

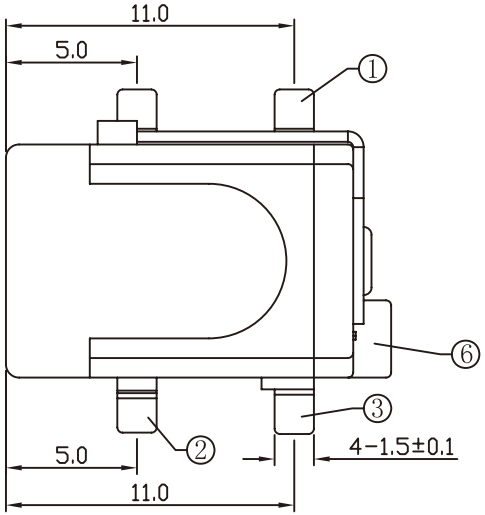

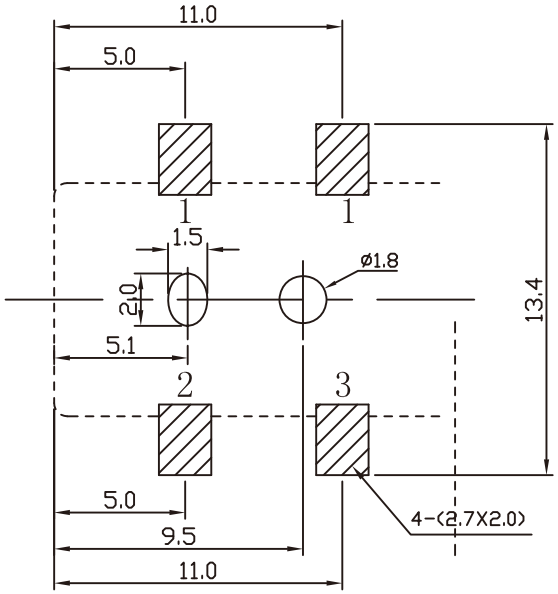

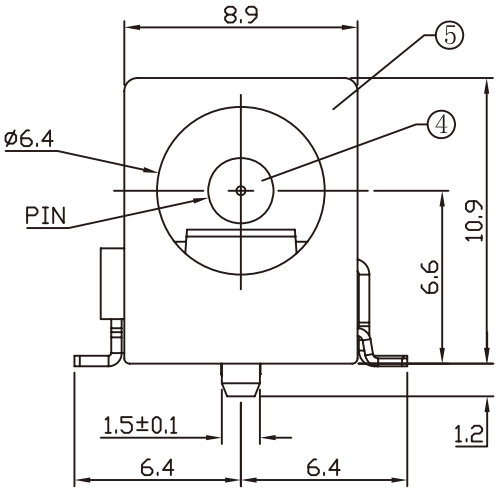

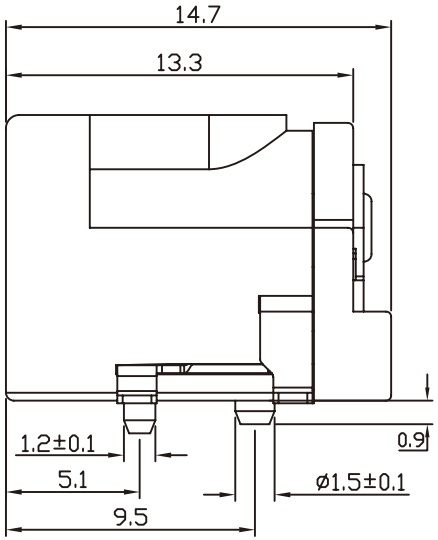

T:1.6 Dimensions of PC board holes

Tolerance : ±0.05(Printed-top view)

SCHEMATIC		
DCJ-W54-20	ø2.0	1 / 3 / 2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.2

LTR	PART NAME	QTY	MATERIAL	REMARK
6	COVER	1	PA9T	UL-94V0(BLACK)
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
3	CURVE PIECE	1	C2680 t=0.40	Sn PLATED
2	SPRING	1	C5191 t=0.30	Sn PLATED
1	CURVE PIECE	1	C2680 t=0.40	Sn PLATED

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ±
UNIT / mm / SCALE 1 : 1	.X ±
DATE	.XX ±
SIZE A4 PPOJECTION	.XXX ±
	ANG ±



ORDER INFORMATION

DCJ-W54-20-LF

SERIES / 90°SMT / POST 5.1+4.4mm / 2.0Ø / LEADFREE

DESCRIPTION: DC POWER JACK