

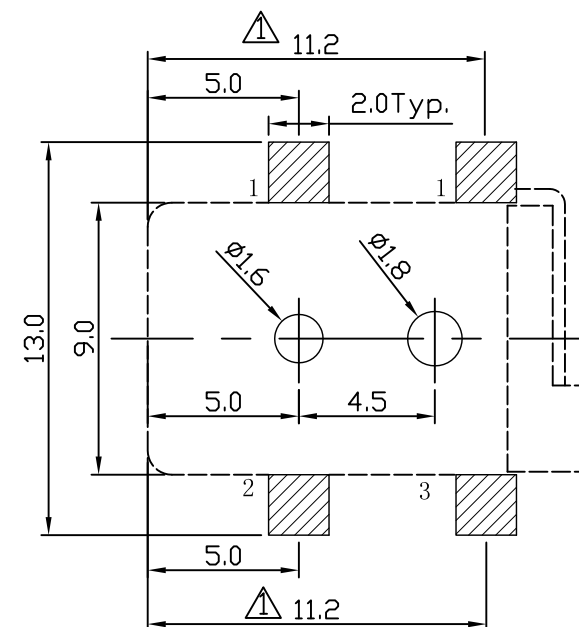
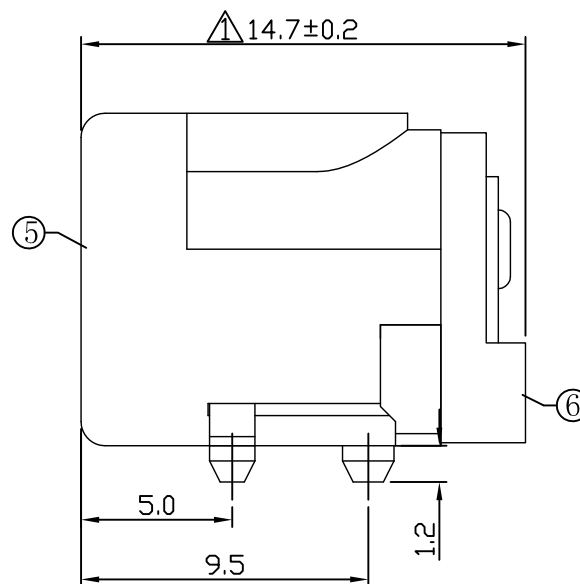
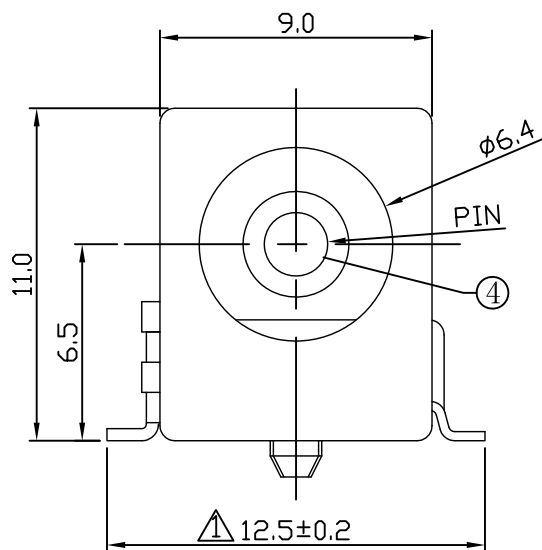


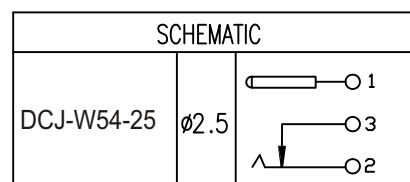

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

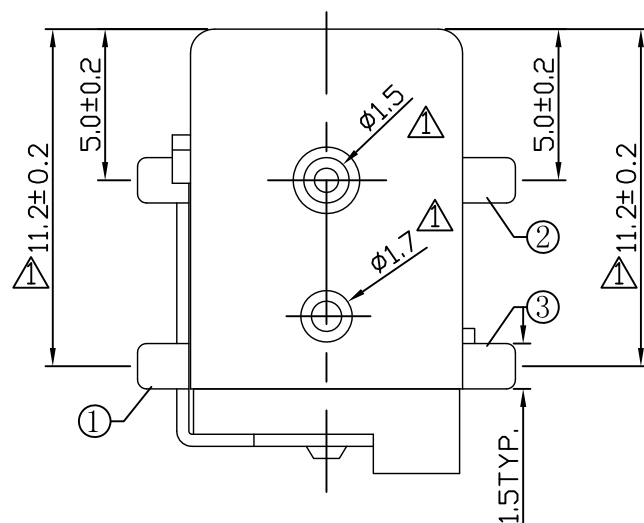

6	COVER	1	PA9T	UL-94V0(BLACK)
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	C2680	MB:Cu Ni PLATED
3	CURVE PIECE	1	C2680 t=0.4	MB:Cu Ag PLATED
2	SPRING	1	C5191 t=0.3	MB:Cu Ag PLATED
1	CURVE PIECE	1	C2680 t=0.4	MB:Cu Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-W54-25-LF
SERIES T LEADFREE
2.50
POST 5.1+4.4mm
90°SMT

DESCRIPTION: DC POWER JACK