
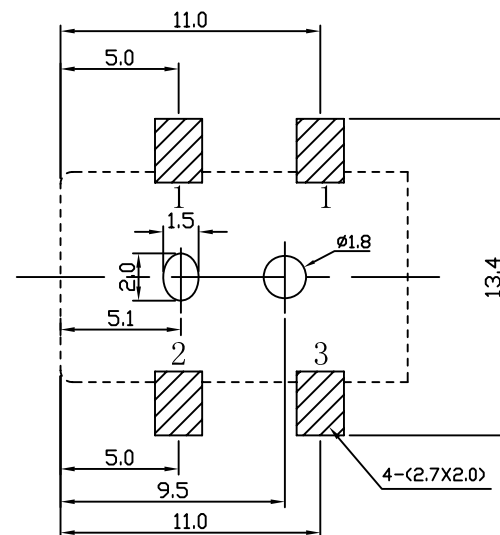
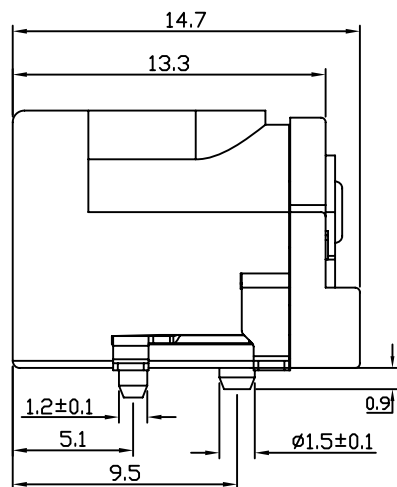
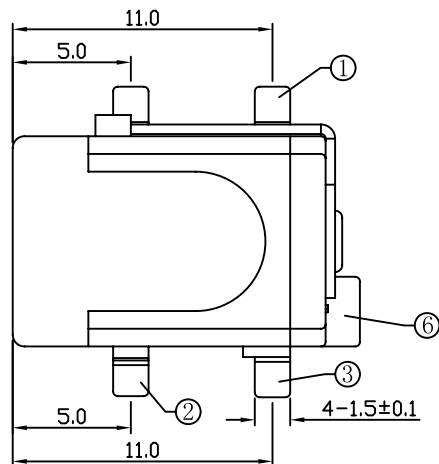
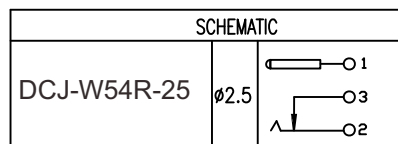


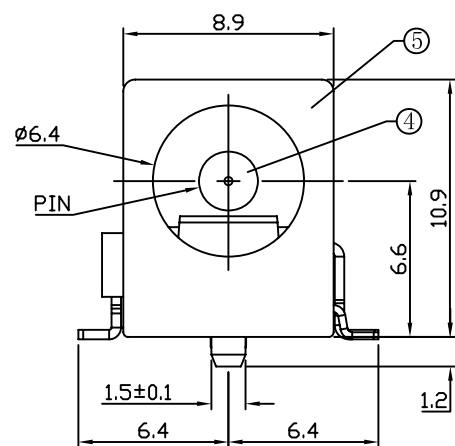

Tolerance : ± 0.05 (Printed-top view)

6	COVER	1	PA9T	UL-94V0(BLACK)
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Cn/Sn PLATED
3	CURVE PIECE	1	C2680 t=0.40	Sn PLATED
2	SPRING	1	C5191 t=0.30	Sn PLATED
1	CURVE PIECE	1	C2680 t=0.40	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

照片框

DCJ-W54R-25-LF
 SERIES REEL 2.5Ø LEADFREE
 POST 5.1+4.4mm
 90°SMT

DESCRIPTION: DC POWER JACK


1 Space=1 pcs
 1 Film packing box=1×250pcs
 =250pcs
 1 Big Carton=10×250pcs=2500pcs
 1 Film packing box Dimension
 =L×W×H
 =5600×32×12.8
 The thickness of the film=0.50mm

1 Embossed Carrier Reel Dimension
 =D×H
 =330×37.1

1 Cover tape Dimension
 =L×W×H
 =5600×25×0.06


1 Big Carto Dimension
 =L×W×H
 =400×350×340

一大箱衣個防水袋，
 每大箱放一包乾燥劑。

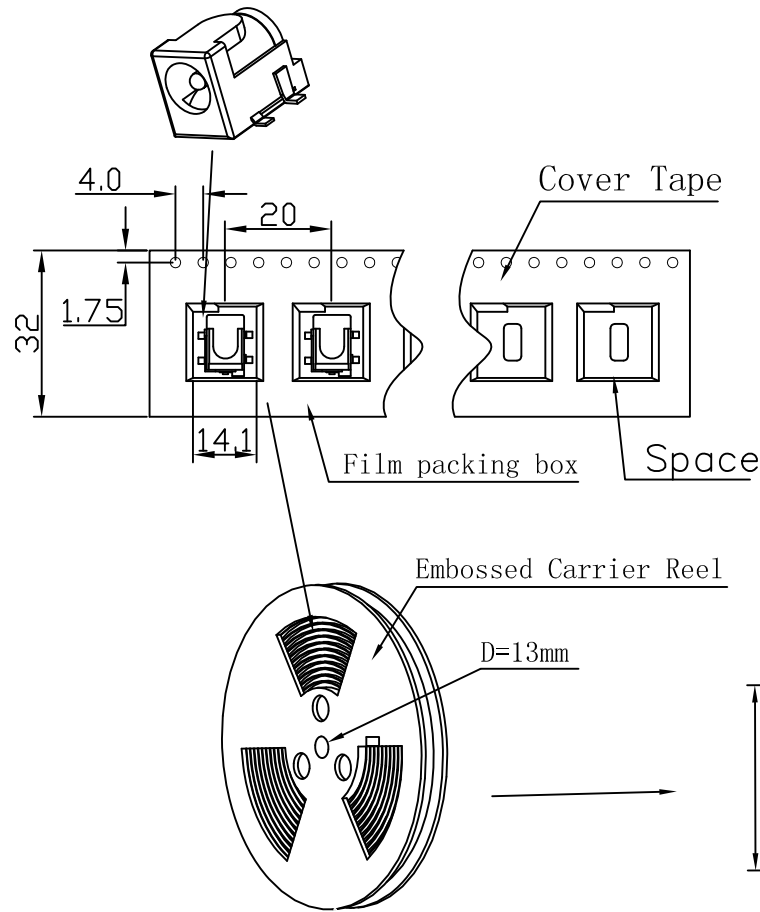

淨重:5.5kg
 毛重:11.5kg

單位:mm

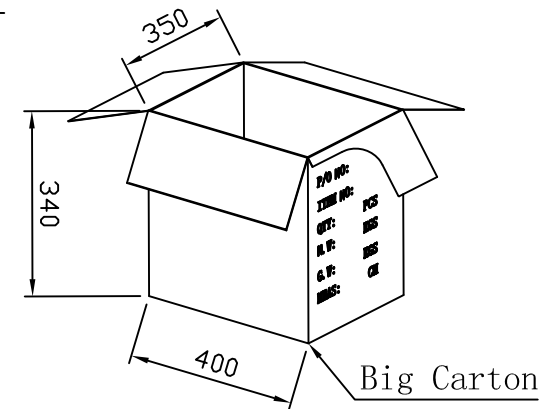

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-W54R-25-LF

SERIES

LEADFREE

2.5Ø

REEL

POST 5.1×4.4mm

90°SMT

DESCRIPTION: DC POWER JACK