

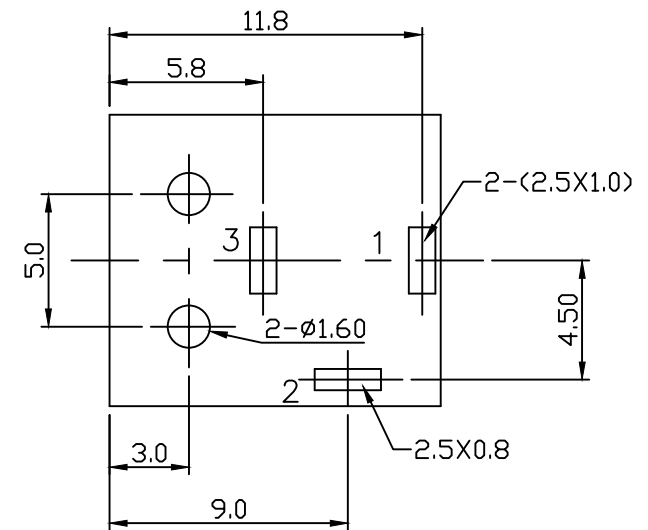
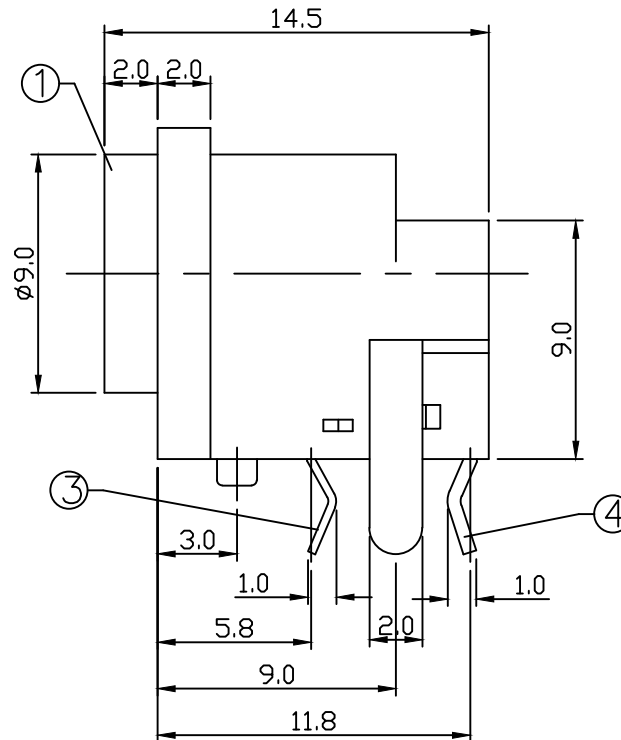


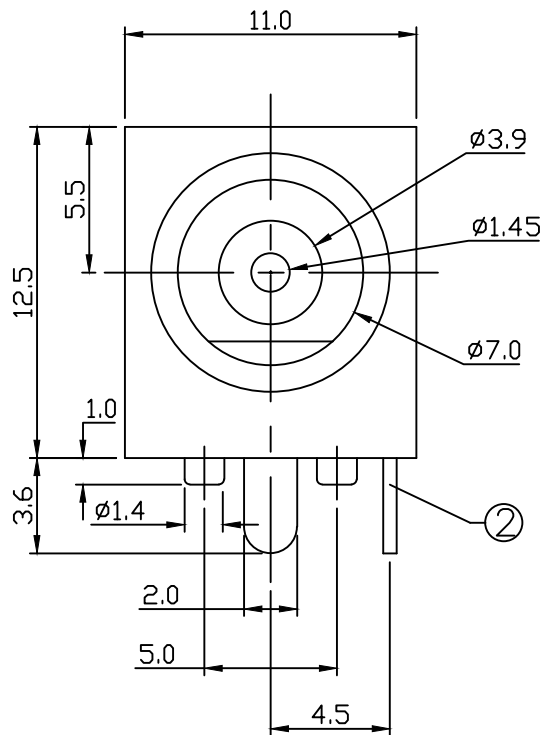

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)



4	CONTACT FOOT	1	C5191	t=0.60	Ag	PLATED
3	SPRING	1	C5191	t=0.30	Ag	PLATED
2	CURVE PIECE	1	C2680	t=0.50	Ag	PLATED
1	HOUSING	1	PA66			UL-94HB(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK		

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCP-R30-145-LF

SERIES

LEADFREE

1.45Ø

POST 3.0mm

DIP 90°

DESCRIPTION: DC POWER JACK