


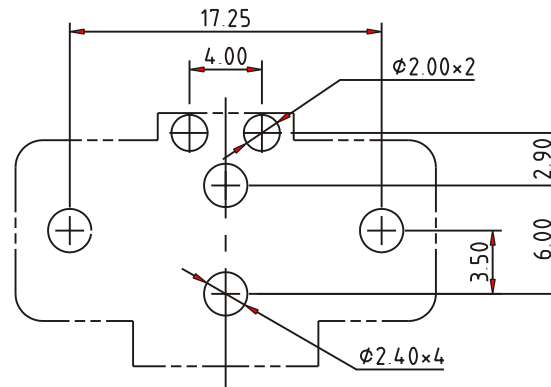
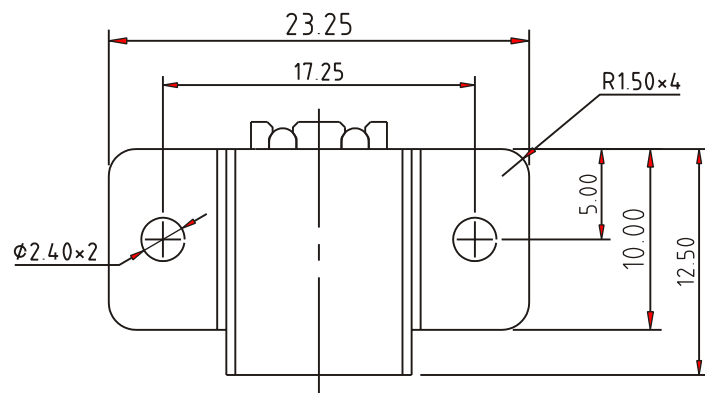
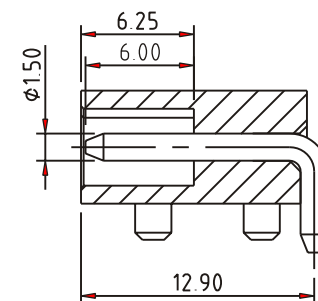


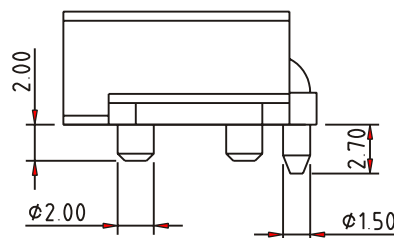

RECOMMENDED PCB LAYOUT

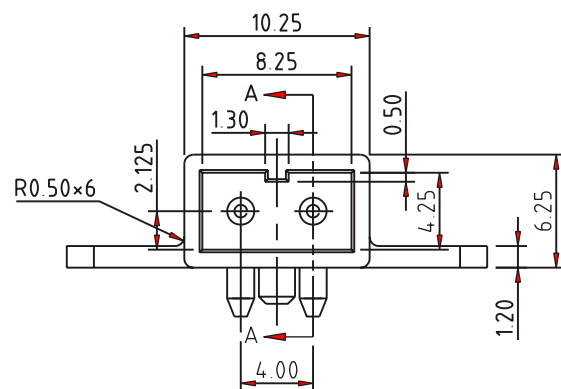

SEC A-A

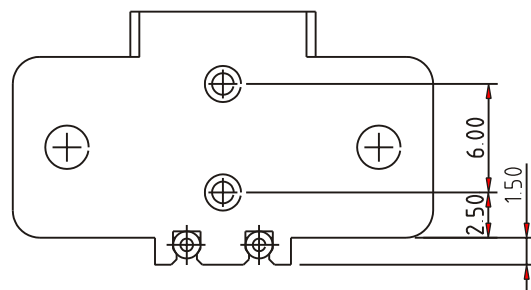

Material:

Housing: PBT+30%G/F, UL94V-0, Black
Contact: Brass, 100u" min. Tin plated over
50u" min. Nickel Plated.

Specification:

Normal Voltage: 12 VDC
Current rating: 2 amp max.
Contact resistance: 30 milliohms max.
Insulation resistance : 100 Mohms min.
at 500 VDC
Withstanding Voltage: 500VAC for 1 minute
Insertion Force: 0.30~2.0 kgf
Life cycle times: 5000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCR-PRE-02-LF
SERIES T T LEADFREE
02 WAY
EAR
DIP 90°
MALE

DESCRIPTION: DC Plug Power connector 2P, 4.0mm Pitch PCB Mount