



P1

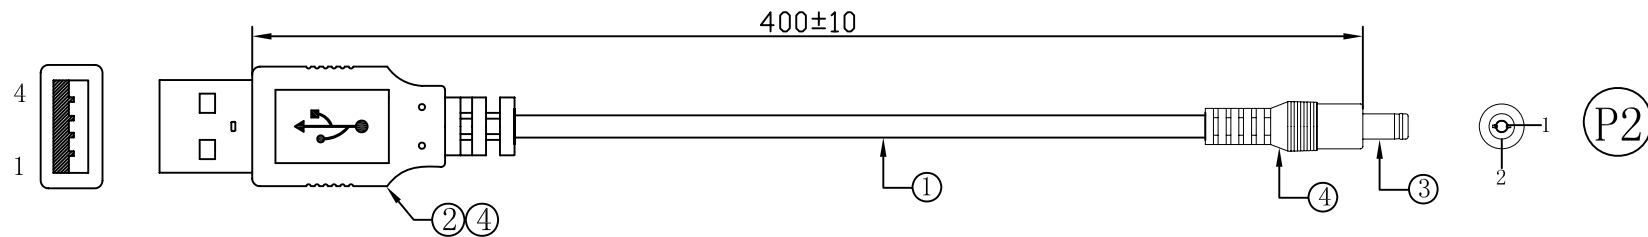

包扎方式:

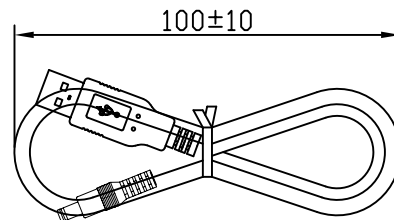

P1

1 ————— 1
4 ————— 2

P2

4	PVC:45P BLACK		Kg/1K
3	DC5.5*2.5 公头 黑胶芯 镀镍 音叉式	1	SET
2	USB AM:GOLD FLASH CONNECTOR,NICKEL PLAIED SHELL, PLASTLC:WHITE	1	SET
1	UL2464 24AWG (11/0.15)*2C OD:3.0MM 黑色	1	PCS
ITEM	STANDARD SPECIFICATION	Q'TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCUB-254A24-M40C-LF

SERIES

LEADFREE

400mm

MALE TO MALE

24 AWG

2.5Ø TO 4 PIN A TYPE

DESCRIPTION: USB AM TO DC 5.5 X 2.5 公头 CABLE L=400MM