




FRONT VIEW

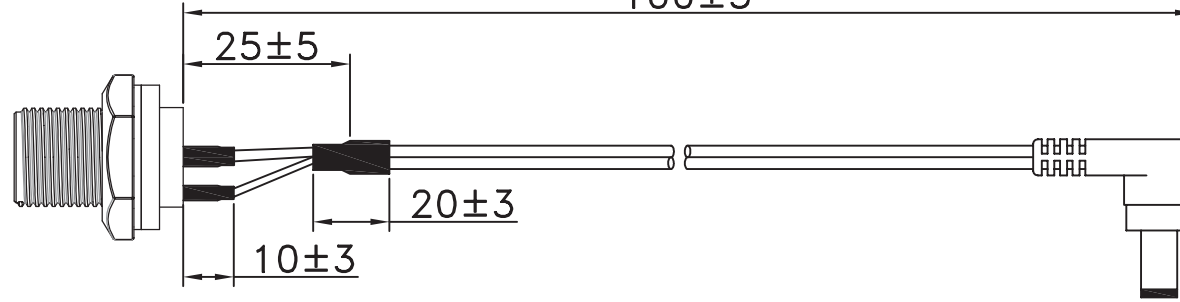

DC JACK PANEL

DC PLUG 90°  
MOLDED BLACK

CONSTRUCTION:

1.CABLE: \* UL2468 (1C/22#)\*2F OD:1.7\*3.4mm BLACK PVC JACKET.

CONNECTORS:

2.DC JACK PANEL: \* DC 5.5\*2.5mm JACK PANEL SOLDER TYPE.

\* BRASS WITH NICKEL PLATED.

\* INSULATOR: BLACK POM.

3.DC PLUG 90°: \* DC 5.5\*2.5mm PLUG SOLDER TYPE.

\* COPPER ALLOY WITH NICKEL PLATED.

\* INSULATOR: BLACK ABS.

\* MOLDED 45P PVC BLACK.

4.SHRINK TUBE: \*  $\phi$ 2.0& $\phi$ 4.0mm BLACK.

5.TEST: \* CT: 2 ohm IS: 5M ohm.

6.PACKING: \* PACK EACH CABLE IN A POLY BAG.

7.MATERIAL: \* MATERIAL WITH RoHS GRADE.

PIN OUT



DCWDC-25R25-E10-LF  
LEADFREE

RoHS Compliant



PART NO. DCWDC-25R25-E10C

DWG NO. DCWDC-25R25-E10C

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:


AREA

REVISIONS

HK

DATE

煜倫股份有限公司

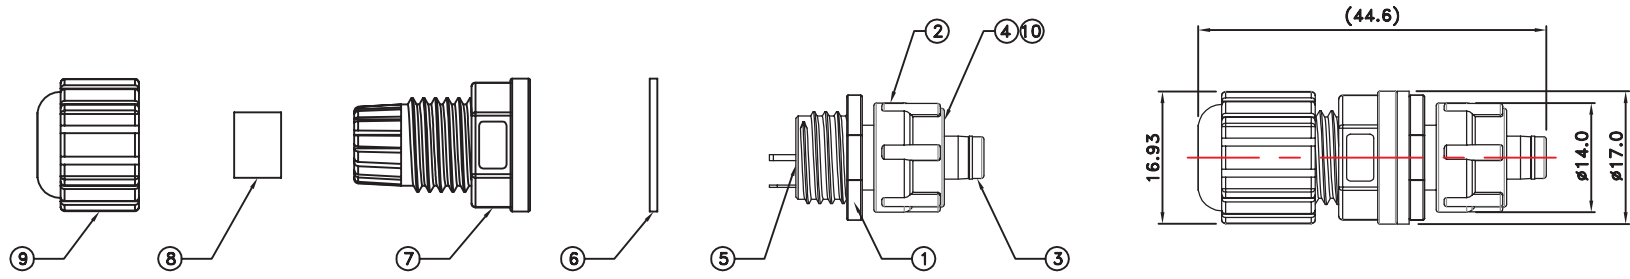

**\*\*NOTES:**

1. HOUSING: THERMAL PLASTIC BLACK COLOR.
2. SCREW NUT: THERMAL PLASTIC BLACK COLOR.
3. PLUG: 5.5\*2.5mm COPPER ALLOY NICKEL PLATED.
4. O-RING: SILICONE RED COLOR.
5. GLUE: EPOXY BLACK COLOR.
6. GASKET: EPDM BLACK COLOR.
7. COVER: THERMAL PLASTIC BLACK COLOR.
8. GLAND: NBR BLACK COLOR.
9. GLAND NUT: THERMAL PLASTIC BLACK COLOR.
10. C-RING: SWB BLACK COLOR.
11. CABLE DIAMETER: 4.0 TO 7.0 mm.



PART NO. DCWDC-25R25-E10C

DWG NO. DCWDC-25R25-E10C

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

