
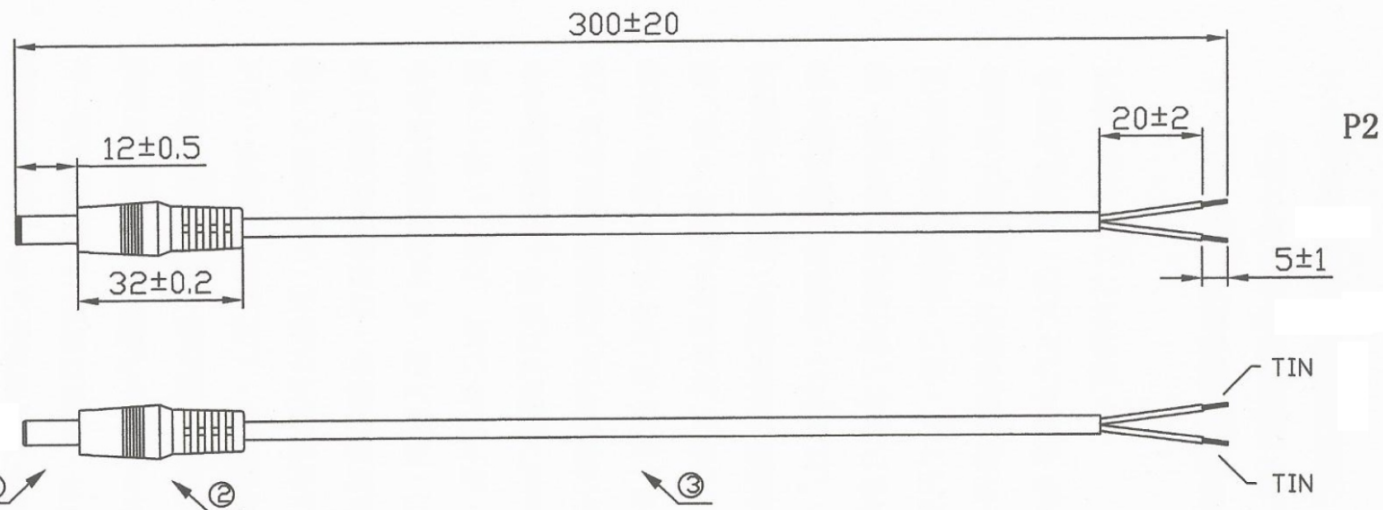


P1



WIRING DIAGRAM

P1		P2
1	RED	TIN
2	BLACK	TIN

ELECTRICAL SPECIFICATION:

- 1.100% OPEN SHORT&MISS WIRE TEST
- 2.VOLTAGE:DC 300V
- 3.INSULATOR RESISTANCE:2M OHM MIN
- 4.CONDUCTIVE RESISTANCE:5 OHM MAX

NO.	NAME	DESCRIPTION	QTY
①	CONNECTOR	DC PLUG OD:5.5MM*ID:2.1MM;NICKEL PLATED	1PC
②	PVC	45P PVC BLACK COLOR;RoHS	8G
③	CABLE	NO-UL 22AWG (21*0.1BC)*2C; OD:3.5MM;BLACK ;L=300MM	1PC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±

照片框

ORDER INFORMATION

DCX1-200022-M30C-LF

SERIES

2.00

22 AWG

MALE

300mm

LEADFREE

DESCRIPTION: