


P1.

DC4.0*1.7 JACK

P2.

S/T

WIRING DIAGRAM

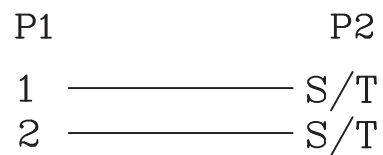

2	CORE CONN.P2	1	SET	RH 19.5*28.5*L:12.8mm DC 4.0*1.7mm JACK
1	CABLE1	300	mm	UL2464 26AWG 2C OD:3.40mm # BLACK HALF FOG (VENDER FOR UL2464 APPROVED)
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCX1-401726FC1-Fxxx-LF

SERIES

3.2x0.9mm

LEADFREE
22C:220mm
3M:3000mm
FEMALE
FERRITE CORE
26 AWG

DESCRIPTION: DC4.0*1.7 JACK TO ST L:220mm BLACK